
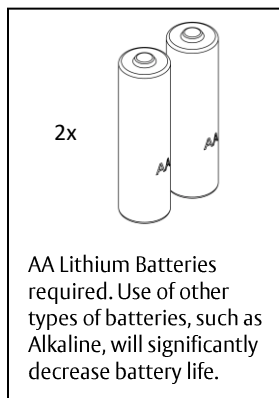


Securitron R100 Aperio® Wireless Card Reader

ASSA ABLOY

Installation and Operating Instructions

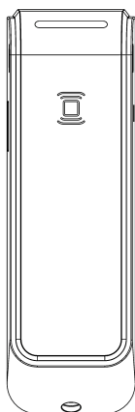

Product Specifications

Wireless Frequency: 2.4GHz, IEEE 802.15.4, using AES 128-bit encryption

Lock Battery Type: AA Lithium, 1.5 Volts (V)

Battery Life: 50,000 cycles*

**All battery life claims are approximate and based on a set configuration profile. Battery performance is based on pre-defined system settings such as battery chemistry and battery model used, credential presentation settings (LED/buzzer), UHF polling period, UHF status intervals, and operations per day. Actual battery performance will vary and depends on the factors above.*

Operating Temperature: 32° to 122° F (0° to 50° C)

HID® multiCLASS SE® technology Credentials Supported:

- High Frequency (13.56 MHz):
 - HID iCLASS®
 - HID iCLASS SE® (SIO-enabled)
 - HID iCLASS® Seos™
 - HID MIFARE® SE
 - HID DESfire® EV1 SE
 - MIFARE CLASSIC
 - DESfire® EV1
- Low Frequency (125 kHz):
 - HID Prox®, AWID, EM4102, ioProx
- NFC-enabled Mobile Phones

Recommended tools


- Level
- Pencil, Wax Pencil
- Clamp

Package Contents


Reader




Backplate

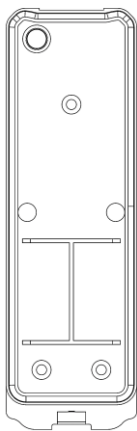

VHB Tape




Torx T8
4-40 x 1/4"
Security Screw




Torx T8 Driver
Security Bit



Alcohol Swab




2X AA Lithium
Batteries




For Technical Support Please call 1-800-810-WIRE

Mounting the Back Plate

1. Level and mark the desired placement. Clean the mounting surface with provided alcohol swab. Remove cover from backplate.

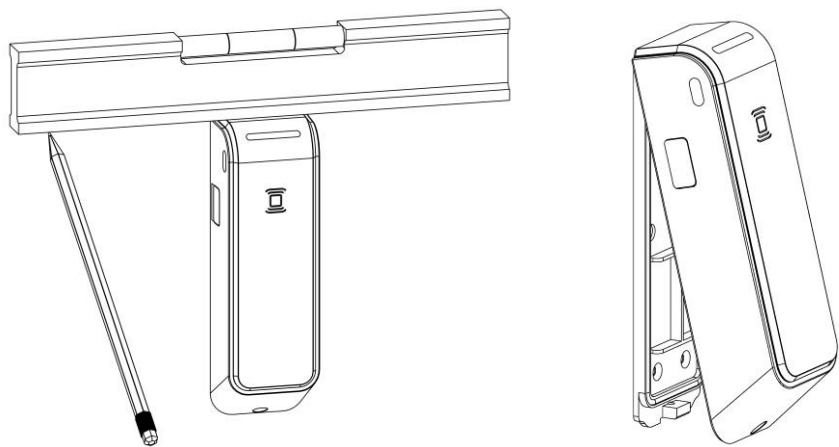


2. Cut the VHB tape into two pieces and apply tape as shown. Mount backplate to marked location and apply pressure to activate tape adhesive.

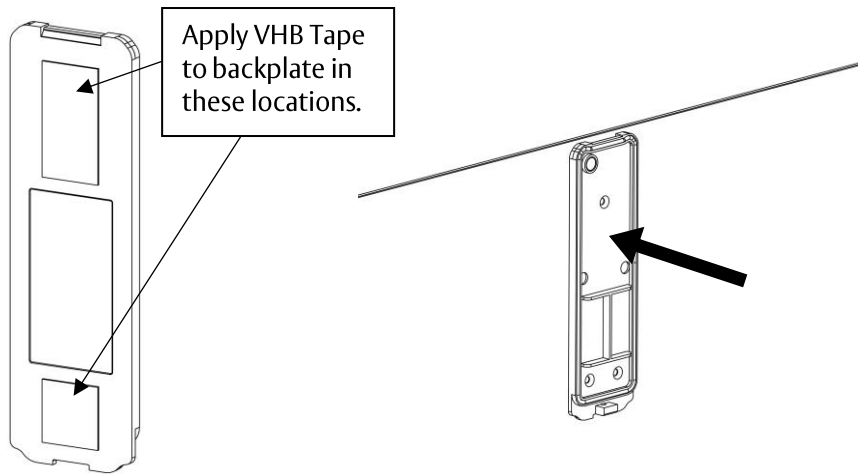


Note: VHB tape is intended to be used on glass and non-porous metal surfaces. For all other surfaces, use an appropriate adhesive and follow the manufacturer's instructions.

Finishing the Installation

1. Install batteries.

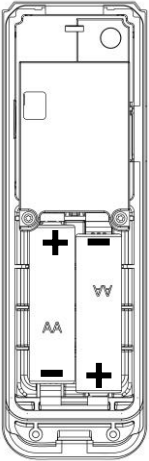


2. Secure reader to backplate.

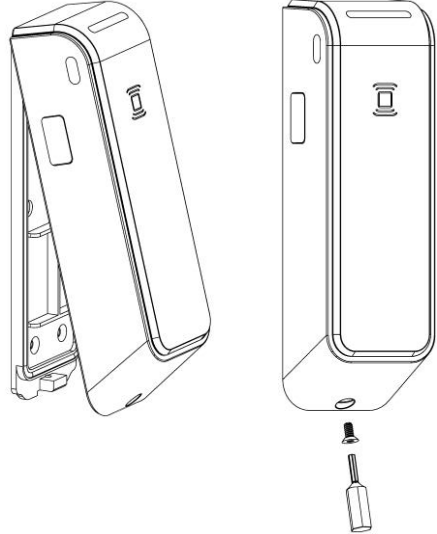

Note: Ensure reader is fully seated against the backplate and the screw hole is properly aligned before

Micro USB Port


For emergency power & local (hard wired) firmware updates, use micro USB port located on the side of the R100 reader.



LED Codes

ASSA ABLOY			Aperio LED LOCK Codes:	
One yellow flash		Card read		
One green flash		Access granted		
Five yellow, one red flash		Force closed (in open mode)		
Continous yellow flashes (.25 sec every second)		Comhub busy		
One red flash		Access denied (AC online)		
Three red flashes		Access denied (AC offline)		
Continous red flashes (.125 sec every second)		Lock is blocked (when closing)		
Ten red flashes		Error in Lock		
Continous yellow flashes (.25 sec every 5 seconds)		Low Battery		
Continous red flashes (.25 sec every 5 seconds)		Dead Battery		

ASSA ABLOY			Aperio LED HUB Codes:	
Steady Green		Online		
Green, 1 red flash		Lock offline		
Green, 2 red flashes		Access control offline		
Green, 3 red flashes		Access control offline and Lock offline		
		UHF communication		

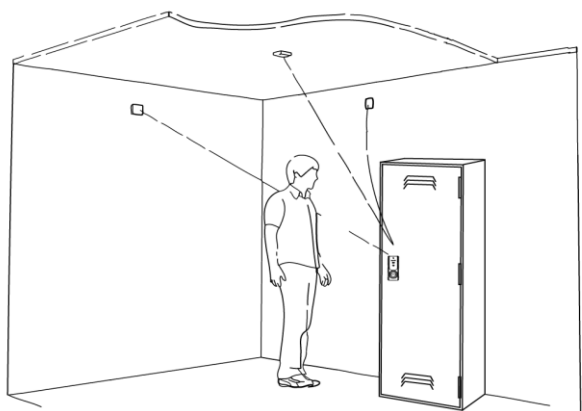


Technical Data - AH20

Approvals	CE, ETL, FCC, IC, C-Tick
Safety and emissions	FCC 47CFR Part 15 subpart B and subpart C; IC RSS-210 EN ETSI 301 489-17 v2.1.1; EN ETSI 300 328 v1.7.1; EN 60950-1 ed.2 2007
Dimensions	82x82x37
Power Supply	8-24 VDC
Current	250 mA minimum
Internal Antenna	2 cross polarized dipoles
External Antenna (Part No. EXT-10-ANT)	One reverse polarity SMA external antenna connector. Optional antenna type dipole with max antenna gain of 3.9dBi
Radio Standard	IEEE 802.15.4(2.4GHz) - 15 channels (11-25)
Encryption (Radio Communications)	AES 128 bits
Wireless Operating Range	Up to 50 ft
Receiver Sensitivity	100dBm 20%PER
Wireless Transmit Power	10 dBm/MHz
Class of Protection	IP 20
Operating temperature	5°C to 35°C
Humidity	< 95% non-condensing
Status	LED (red/green/orange)

Connecting the Hub

The following applies only to Aperio factory paired kits with AH20 Hubs.

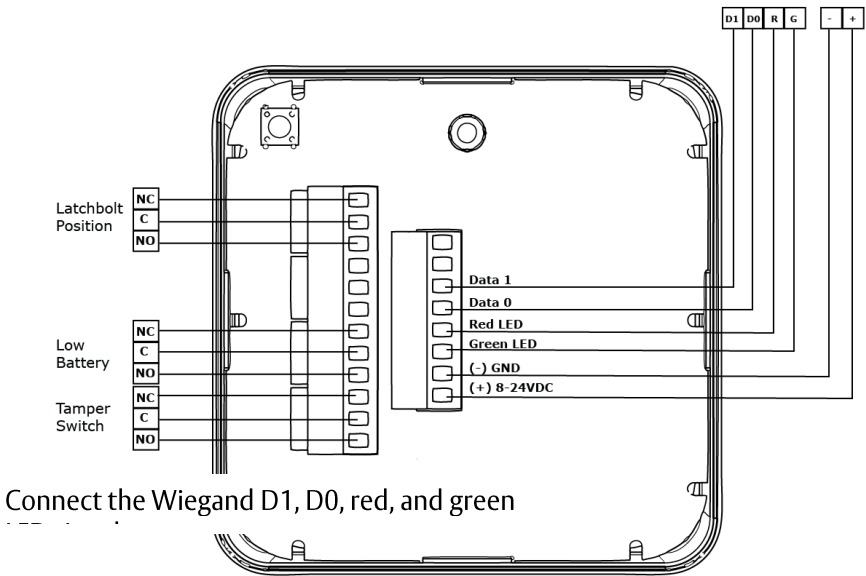

Connect the Wiegand D1, D0, red, and green

Note: The **Green LED** input is used to grant access to the cabinet lock. If the Green LED signal is not available to indicate approved access, the approval input can be activated by a relay with “NO” attached to Green LED and “C” to GND.

The **Red LED** input is used to indicate access denied. If the RED LED signal is not connected, the lock will flash RED three times when a non-approved card is presented indicating loss of connection to the hub rather than access denied. Any other codes may be reference on the LED reference card

WARNING

FCC Statement

This equipment has been tested and found to comply with the limits for a class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

(continued on next page)

1. Reorient or relocate the receiving antenna.
2. Increase the separation between the equipment and receiver.
3. Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
4. Consult the dealer or an experienced radio/TV technician for help.

Operation with non-approved equipment is likely to result in interference to radio and TV reception. The user is cautioned that changes and modifications made to the equipment without the approval of manufacturer could void the user's authority to operate this equipment.

IC Statement

This device complies with Industry Canada license-exempt RSS standards(s).
Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation.

Conformité aux normes FCC

Cet équipement a été testé et trouvé conforme aux limites pour un dispositif numérique de classe B, conformément à la Partie 15 des règlements de la FCC. Ces limites sont conçues pour fournir une protection raisonnable contre les interférences nuisibles dans une installation résidentielle. Cet équipement génère, utilise et peut émettre des fréquences radio et, s'il n'est pas installé et utilisé conformément ment aux instructions du fabricant, peut causer des interférences nuisibles aux communications radio. Rien ne garantit cependant que l'interférence ne se produira pas dans une installation particulière. Si cet équipement provoque des interférences nuisibles à la réception radio ou de télévision, qui peut être déterminé en comparant et en l'éteignant, l'utilisateur est encouragé à essayer de corriger les interférence par une ou plusieurs des mesures suivantes:

1. Réorienter ou déplacer l'antenne de réception.
2. Augmenter la distance entre l'équipement et le récepteur.
3. Branchez l'appareil dans une prise sur un circuit différent de celui auquel le récepteur est connecté.
4. Consultez votre revendeur ou un technicien radio / TV pour assistance. Avertissement

Les changements ou modifications à cet appareil sans expressément approuvée par la partie responsable de conformité pourraient annuler l'autorité de l'utilisateur de faire fonctionner cet équipement.

Conformité aux normes IC

Cet appareil est conforme avec Industrie Canada exempt de licence RSS standard(s).
Son fonctionnement est soumise aux deux conditions suivantes:

- (1) cet appareil ne peut causer d'interférences, et
- (2) cet appareil doit accepter toute interference, y compris des interférences qui peuvent provoquer un fonctionnement indésirable du périphérique.

ELECTRONIC SECURITY HARDWARE

HES | Securitron

techsupport.esh@assaabloy.com | assaabloyesh.com

800.626.7590 | 10027 S. 51st Street, Ste. 102 Phoenix, AZ 85044 USA

Patent pending and/or patent: www.assaabloydss.com/patents

Copyright © 2019, Hanchett Entry Systems, Inc., an
ASSA ABLOY Group company. All rights reserved. Reproduction
in whole or in part without the express written permission
of Hanchett Entry Systems, Inc. is prohibited.