


CONVENTIONAL MORTISE BOLT LOCKS

Distributor Discount Code **AK LIST**

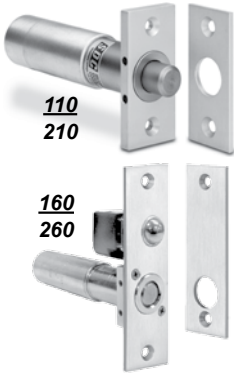

110/160 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
210/260 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
 Mortise strike standard. **Not for use in wood frames.**

Locknetics replacements available for discontinued models 401, 402 and 404. Contact factory, POA.

5" depth required

110IV	2-3/4" x 1-1/4" Face plate, less auto relock switch, failsafe V 628 Aluminum (standard)	180.00
210HV	2-3/4" x 1-1/4" Face plate, less auto relock switch, failsecure V 628 Aluminum (standard)	180.00
160IV	4-7/8" x 1-1/4" Face plate with auto relock switch, failsafe V 628 Aluminum (standard)	240.00
260HV	4-7/8" x 1-1/4" Face plate with auto relock switch, failsecure V 628 Aluminum (standard)	240.00

SPACESAVER® MORTISE BOLT LOCKS FIT 1-3/4" FRAMES

Distributor Discount Code **AK LIST**

Dimensions: 8"L x 1-1/2"W x 1-5/8"D
FS/1090/1490 Dual Voltage Coil: 900/450 mA @ 12/24 VDC
1290/2490 Dual Voltage Coil: 900/450 mA @ 12/24 VDC



UL US LISTED Auxiliary Locks
UL10C Positive Pressure Compliant
UBC Classified in accordance with Uniform Building Code standard 7-2 "Fire Test for Door Assemblies"



FS23MIV	Dual failsafe	360.00
1091AIV	Failsafe	350.00
1091ADLIV	Dead locking, failsafe	415.00
1291AHV	Failsecure	415.00
1490AIV	Fits 1-1/2" frame (non UL), failsafe	415.00
2490AHV	Failsecure. Fits 1-1/2" frame (non UL), failsecure V 628 Aluminum Finish (standard)	490.00

SPECIAL FINISHES

Add to List

Y	335 Black	36.00
Plated Architectural Finishes Special order - no cancellations, no return		
C	605 Bright Brass	78.00
D	606 Dull Brass	78.00
F	611 Bright Bronze	78.00
G	612 Satin Bronze	78.00
H	613 Oil Rubbed Bronze	78.00
P	625 Bright Chrome	78.00
Q	626 Dull Chrome	78.00
U	630 Stainless Steel	78.00

HEAVY DUTY SPACE SAVER® MORTISE BOLT LOCKS

Distributor Discount Code **AK LIST**

1190A failsafe, 0.7Amp @ 24VDC
2090A failsecure, 2.5 Amp In rush, 0.4 Amp seated @ 24VDC



1190AU	Failsafe	415.00	2090AU	Failsecure	515.00
---------------	----------	---------------	---------------	------------	---------------

Standard Finish: **U** 630 Dull Stainless Steel
 Specialty Lock Applications available by request

UL US LISTED Auxiliary Locks

UL10C Positive Pressure Compliant
UBC Classified in accordance with Uniform Building Code standard 7-2 "Fire Test for Door Assemblies"

OPTIONS

Add to List

B	Bolt position sensor, SPDT	55.00
D	Door position sensor, SPDT	55.00
BR64XL	Rectifier for AC Operation	25.00
PR1000	Power Regulator for 1090 and 1190 series	60.00



SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective October 1, 2012