


# HES<sup>®</sup> Folger Adam 310-1(X) Electric Strike Body Only

*Works with cylindrical and mortise locksets with 1/2", 5/8" or 3/4" throw latchbolts*

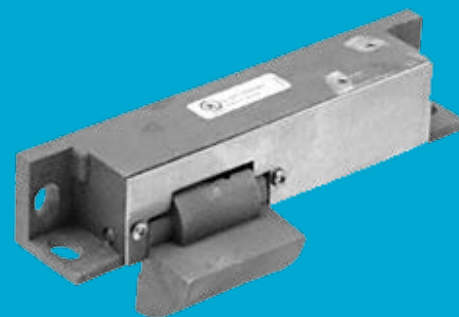

The 310 series is a 3-hour fire rated, industrial grade electric strike designed for extreme heavy duty applications.

The all stainless steel construction of this device makes it ideal for strength and corrosion resistance.

## Features

### Standard Features

- Tamper resistant, heavy duty construction
- Constructed entirely of stainless steel for strength and corrosion resistance
- Static strength 1,500 lbs
- Dynamic strength 70 ft-lbs
- Endurance 1 million cycles
- Adjustable keeper allows for door and frame alignment 1/2", 3/4" [19mm] and 1" [25.4mm] keeper depths
- Non-handed
- Fail secure (standard)
- Plug-in connector
- SecuriCare five-year, no-fault, no questions asked warranty

### Optional Features

- Fail safe
- **LCBMA** Latchbolt & Locking Cam Monitor with Auxiliary Switch

### Accessories

- **152** Universal mounting tabs
- **310-2-3** Strike latch guard (astragal)
- **2001-1** Wire-in bridge rectifier
- **2001M** Plug-in bridge rectifier
- **2004M** Electrolynx<sup>®</sup> adapter
- **2005M3** SMART Pac<sup>®</sup> III
- **2006M** Plug-in buzzer



Grade 1

SecuriCare  
WarrantyCylindrical  
LocksetsMortise Locks  
without  
DeadboltRim Exit  
DevicesSpecialty  
Locksets

Fire Rated

Burglary  
Rated

## HES Folger Adam 310-1(X) Electric Strike Body Only

### Dimensions

#### 310-1(1/2)

For use with up to 5/8" throw latchbolts (without deadbolt)

1/2" keeper standard

#### 310-1(3/4)

For use with 3/4" [19mm] throw latchbolts (without deadbolt) on single and double glass door applications with the addition of a third party faceplate.

- Works with Rockwood PDU8000 and CR Laurence PA100 Series panic devices when used with ESK Series stop/strike

3/4" [19mm] keeper standard

#### 310-1(1)

For use with both a 3/4" [19mm] throw latchbolt and a 1" [25.4mm] throw deadbolt

1" [25.4mm] keeper standard

#### 310-1(PK)

For up to 3/4" [19mm] Pullman style latchbolts

PK keeper standard

#### 310-1(SK)

For Squarebolt® style rim exit devices

- Works with Corbin Russwin® ED4200S, ED5200S and ED5200SA Securebolt® or Yale® 7150(F), 7250, 7270M(F) Squarebolt® Exit Devices.

SK keeper standard

### Specifications

#### Certifications

- UL 10C fire rated, 3-hour single door (fail secure only)
- UL 10C fire rated, 3-hour double door (fail secure only)
- CAN4-S104 (ULC-S104) fire door conformant
- UL 1034, burglary-resistant listed
- UL 294 (6th Edition) listed
- ANSI/BHMA A156.31, Grade 1
- NFPA-252 fire door conformant
- ASTM-E152 fire door conformant
- RoHS compliant

#### Electrical (Continuous Duty)

- 510 mA at 12 VDC/250 mA at 24 VDC

### How to Order

Series	Keeper Style	Fail Secure / Safe	Voltage	Option (s)
<b>-310-1</b>	<b>(3/4)</b>	<b>- F</b>	<b>- 24D</b>	<b>- LCBMA</b>
Strike Body Only	(1/2) 1/2" keeper	(blank) Fail Secure (standard)	12D 12 Volt	LCBMA Latchbolt & locking cam monitor with auxiliary switch
SB-310-1	(3/4) 3/4" keeper	F Fail Safe	24D 24 Volt	
	(1) 1" keeper			
	(PK) For use with 3/4" Pullman style latchbolts			
	(SK) For use with Squarebolt® style rim exit devices			