Security Door Controls
801 Avenida Acaso, Camarillo, Ca. 93012 • (805) 494-0622 •
www.sdcsecurity.com • E-mail: service@sdcsecurity.com

INSTALLATION INSTRUCTIONS
451/452 SERIES PUSH SWITCH

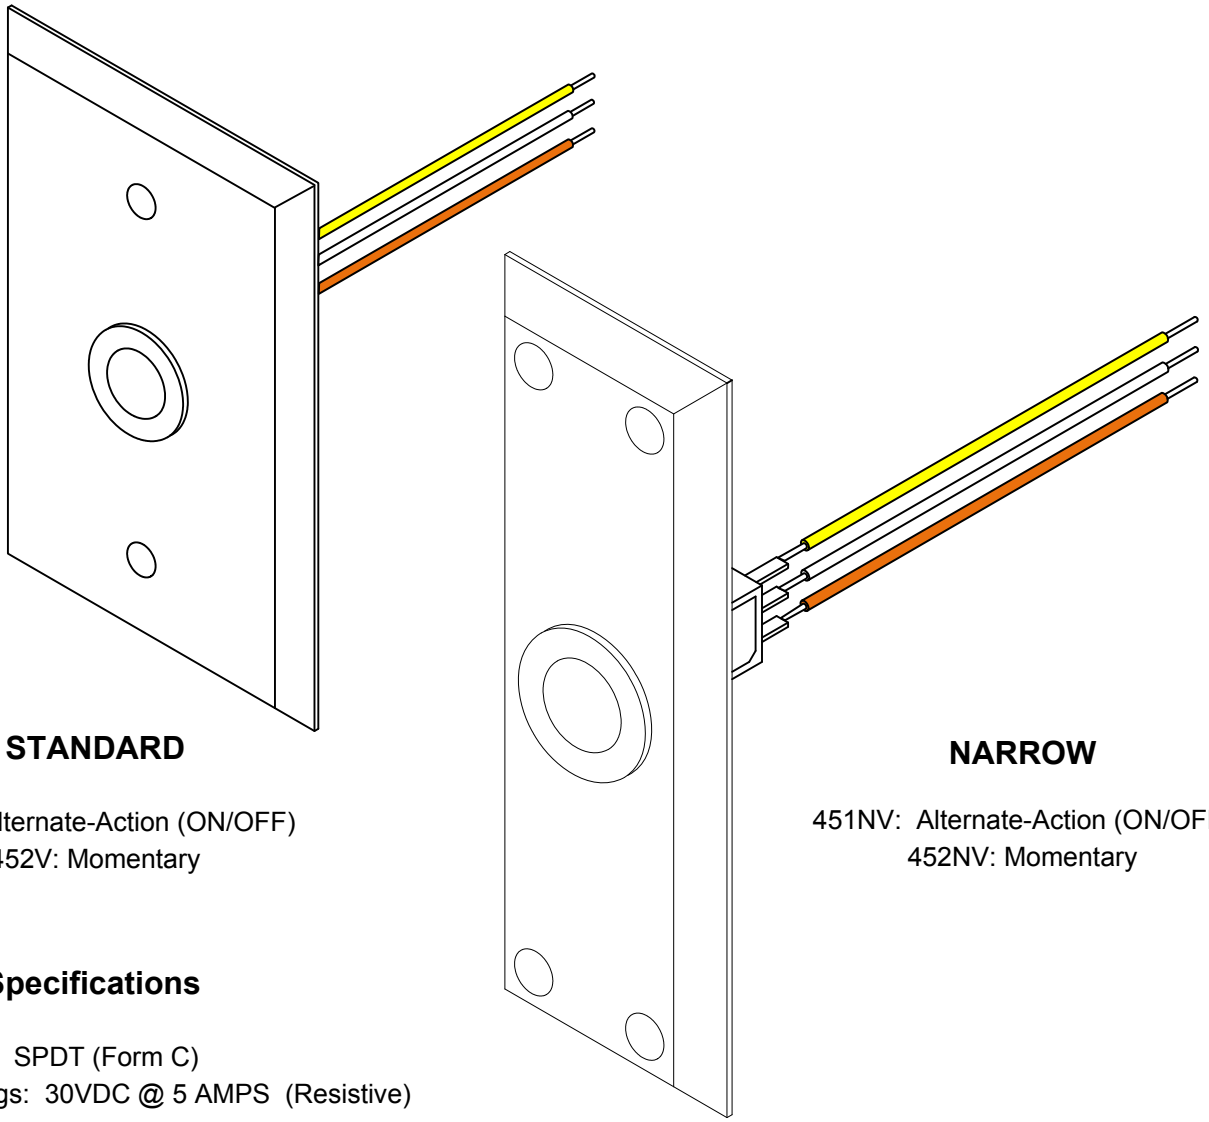

STANDARD

451V: Alternate-Action (ON/OFF)
452V: Momentary

NARROW

451NV: Alternate-Action (ON/OFF)
452NV: Momentary

Electrical Specifications

Contact Type: SPDT (Form C)
Contact Ratings: 30VDC @ 5 AMPS (Resistive)

Wiring

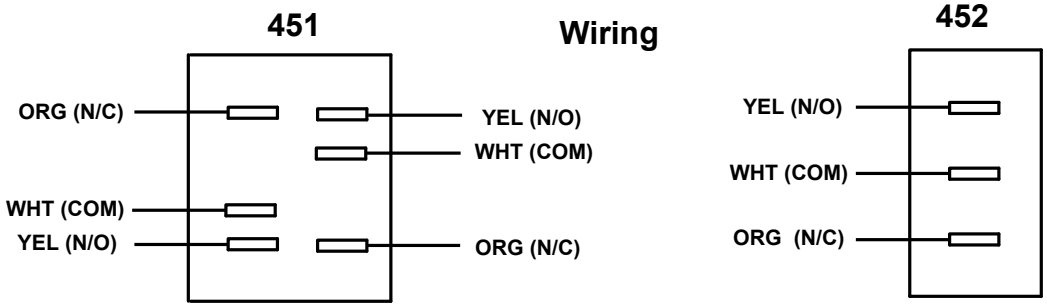

Any suggestions or comments to this instruction or product are welcome. Please contact us through our website or email engineer@sdcsecurity.com