LIST

# 480 Series Push Plate Switches - Wireless and Hardwired

# Distributor CK Discount Code CK

### For Handicap Access, Automatic Door **Activation & Request-to-Exit Applications**

- Door Opener Activation
- Automatic Door Activation
- Access Control Request-to-Exit (RTE)
- Door Sequencer Activation




can be used with wireless = transmitter and receiver

SPECIFICA	SPECIFICATIONS					
Mounting Plate	Heavy Duty 1/8" (3.2mm) mounting plate					
Faceplate	Heavy 18 Gauge (1.02mm), 630/US32D Satin Stainless Steel Standard					
Legends	Bold debossing or engraving with black, blue or white infill					
Contacts	SPDT or DPDT, 15 Amps @ 125/250VAC; UL 1054, CSA Listed					
Depth	[Narrow & (1) Gang] SPDT-7/8" deep, DPDT-1-3/8" deep, [4 ½", & 6" square/ round] SPDT-3/4" deep, DPDT-1-5/32					

















# 2¾" x 4½" Single (1) Gang Push Plate Switch

- Pressing any part of the push plate (2 3/4" x 4 1/2") causes switch actuation
- Recessed, Surface Box or Bollard Mount Depth: SPDT 3/4" deep; DPDT 1 1/2" deep

SPDT Model	Description		DPDT Model	Description	
482O2U	Push to Open, black infill	80.00	484O2U	Push to Open, black infill	106.00
482A2U	5. Push to Open, blue infill	80.00	484A2U	5 Push to Open, blue infill	106.00
480-2SB	Surface mount box, 2 3/4" x	4 1/2" x 1 5	5/8" O.D.		30.00
















- Pressing any part of the push plates 4" ½" x 4 ½" active area causes switch actuation
  - 1 Gang or 2 gang recessed or Surface Box Mount 


    Depth: SPDT 56" deep; DPDT 1 ½" deep

SPDT Model	Description		DPDT Model	Description	
482O4U	Push to Open, black infill	88.00	484O4U	Push to Open, black infil	114.00
482A4U	5 Push to Open, blue infill	88.00	484A4U	5 Push to Open, blue infill	114.00
480-4FB	Square Flush Recessed box, 1-gang, 6 3/4" x 6 3/4" x 1 7/8" O.D.				
480-4SBB	480-4SBB Surface mount box, 4-1/2" x 4-1/2" x 1 3/4" O.D. with Battery compartment for wireless				34.00
480-4SB	Surface mount box, 4-1/2" x 4-1/2" x 1 7/8" O.D.				65.00
480-4SE	3-sided stainless shroud for	exterior ap	plications, 4-11/1	16" x 4-7/8" x 12"	40.00









- Pressing any part of the push plates 6" x 6" active area causes switch actuation
- 1 Gang or 2 gang recessed or Surface Box Mount Depth: SPDT 5/8" deep; DPDT 1 1/2" deep

-					
SPDT Model	Description		DPDT Model	Description	
48206U	Push to Open, black infil	93.00	484O6U	Push to Open, black infil	118.00
482A6U	& Push to Open, blue infill	93.00	484A6U	Push to Open, blue infill	118.00
480-6SBB	Surface mount box, 2-gang	Battery C	ompartment, 4 1/	/2" x 4 1/2" x 1 3/4" O.D.	34.00

# 480 Series Push Plate Switches - Wireless and Hardwired (continued)

LIST



# 4 1/2" Round Push Plate Switch

Pressing any part of the push plates 4" ½ active area causes switch actuation

1 Gang or 2 gang recessed or Surface Box Mount • Depth: SPDT 5%" deep; DPDT 1 1/2" deep

SPDT Model Description			DPDT Model Description			
482O4RU	Push to Open, black infil	88.00	48404RU	Push to Open, black infil	114.00	
482A4RU	& Push to Open, blue infill	88.00	484A4RU	Push to Open, blue infill	114.00	
480-4RSB	Surface box, 5" Dia., 2 1/8" O.D.	58.00	480-4RFB	Black Flush Escutcheon, 5 7/8" overall diameter with trim ring	65.00	
480-4RG	4" round gasket	16.00	480-4RRB	Surface Escutcheon, 7 7/8" Dia., 1 9/16" overall height	65.00	





### 6" Round Push Plate Switch

Pressing any part of the push plates 6" active area causes switch actuation

1 Gang or 2 gang recessed or Surface Box Mount • Depth: SPDT %" deep; DPDT 1 1/2" deep

SPDT Model	Description		DPDT Model	Description	
48206RU	Push to Open, black infil	93.00	48406RU	Push to Open, black infil	118.00
482A6RU	& Push to Open, blue infill	93.00	484A6RU	5. Push to Open, blue infill	118.00
480-6RSB	Surface box Round, 6 7/16" Dia., 2 1/8" O.D.	58.00	480-6RFB	Recessed Flush Escutcheon, 7 3/4" overall diameter with trim ring	65.00
480-6RG	6" round gasket	17.00			

# **480 Series Push Plate Switches - HDPE (High Density Polyethylene)**

Distributor CK
Discount Code CK LIST

150.00





SPDT Model

482A4SPH

# 4 1/2" x 4 1/2" Square Push Plate Switches

Description

Pressing any part of the push plates 4" ½" x 4 ½" active area causes switch actuation

1 Gang or 2 gang recessed or Surface Box Mount • Depth: SPDT %" deep

Push to Open, white infill on blue HDPE











480-4FB	Square Flush Recessed box, 1-gang, 6 3/4" x 6 3/4" x 1 7/8" O.D.	65.00
480-4SBB	Surface mount box, 4-1/2" x 4-1/2" x 1 3/4" O.D. with Battery compartment for wireless	34.00
480-4SB	Surface mount box, 4-1/2" x 4-1/2" x 1 7/8" O.D.	65.00
480-4SE	3-sided stainless shroud for exterior applications, 4-11/16" x 4-7/8" x 12"	40.00





# 6" Round Push Plate Switch

Pressing any part of the push plates 6" active area causes switch actuation

1 Gang or 2 gang recessed or Surface Box Mount • Depth: SPDT %" deep

SPDT Model	Description	
482A6RPH	Push to Open, white infil on blue HDPE	180.00
480-6RSB	Surface box Round, 6 7/16" Dia., 2 1/8" O.D.	58.00
480-6RFB	Recessed Flush Escutcheon, 7 3/4" overall diameter with trim ring	65.00
480-6RG	6" round gasket	17.00















# 4 1/2" x 4 1/2" Square Push Plate Switches

- Pressing any part of the split push plates active area causes switch actuation
- 1 Gang or 2 gang recessed or Surface Box Mount Depth: SPDT %" deep

SPDT Model	Description	
482A4VWU	& Arrow (left/right), black infill	390.00
482A4VWPU	& Arrow (left/right) Push to Open, black infill	390.00
48204VPU	Arrow (left/right) Push to Open, black infill	390.00
482A4VWP	& Arrow (left/right) Push to Open, white infill on blue	450.00









480-4FB	Square Flush Recessed box, 1-gang, 6 3/4" x 6 3/4" x 1 7/8" O.D.	65.00
480-4SBB	Surface mount box, 4-1/2" x 4-1/2" x 1 3/4" O.D. with Battery compartment for wireless	34.00
480-4SB	Surface mount box, 4-1/2" x 4-1/2" x 1 7/8" O.D.	65.00
480-4SE	3-sided stainless shroud for exterior applications, 4-11/16" x 4-7/8" x 12"	40.00

# 480 Series Touch Panel Column - Wireless & Hardwire









# Applications

- Wireless & Hardwire
- ADA Ingress/R.E.X/Egress Door Opener Activation
- Access Control Request-to-Exit (REX)
- **Door Opener Activation**

SPDT Model

482AA9

- Automatic Door Activation or Lock Release
- Automatic Door & Exit Device Sequencer Activation



can be used with wireless transmitter and receiver

### **Features**

- Surface wall mount or bollard mount
- Sleek Architectural profile
- No square edges to snag, wide sloping sides deflects impact movement naturally to activate column
- Deflects impact from wheeled carts and conveyances
- Impact & Vandal resistant design, inhibits prying, tampering
- Weather Resistant, no gaps for water or ice penetration
- Choice of SPDT or DPDT, 15 Amps @ 125/250VAC



# 9" X 6" INGRESS-R.E.X TOUCH PANEL COLUMN

Description

5. Push to Open

Fully Active 22-1/2 Sq. Inch Actuation Area Recommended Centerline mounting height 34" to 48" Material: Sturdy 1/8" extrusion with architectural finish **Overall Size:** 9" h x 6" w x 1-1/2" d (229 x 152 x 38mm)

Active Area: 9" h x 2-1/2" w (229 x 63.5mm)



#### SPECIFY FINISH Add to List N/C V 628 Aluminum (standard), blue infill X 613 Dark Bronze, white infill

25.00

# 36" X 6" INGRESS-R.E.X TOUCH PANEL COLUMN

List

298.00

Material: Sturdy 1/8" extrusion with architectural finish
Overall Size: 36" h x 6" w x 1-1/2" d (914 x 152 x 38mm)
<b>Active Area:</b> 36" h x 2-1/2" w (914 x 63.5mm)

SPDT Model	Description		DPDT Model	Description	
482AA36	b. Push to Open	417.00	484AA36	♣ Push to Open	443.00

SPECIFY FINISH Add to List

V 628 Aluminum (standard), blue infill

X 613 Dark Bronze, white infill N/C

# 400 Series Wireless Transmitter and Receiver





LIST

# For Remote Control Versatility for Touch Panel Column and Push Plate Switches



# 433MHz Micro Transmitter

- Requires a non-metalic surface box or standard bollard cap (non-metalic). Works with 400RC433
- Pre-Wired for quick installation
- Antenna magnifies signal

Voltage Input: 9V Battery (included)

Trigger Input: Momentary, N.O.Dry Contact

Temperature: -20F - 100F

**Dimensions:** 1-9/64" x 15/16" x 7/32" (29 x 49 x 6mm)

Model Description

400W1-433 433MHz Micro Transmitter

136.00



# 433MHz 1 Channel Nano Receiver

Designed to control automatic closing and anti-burglar systems. Works with 400W1-433.

Carrier Frequency: 433.92 MHz Power Supply: 12/24 VAC/DC

Relay Numbers: 1 Contacts: C-NO

**Temperature:** -4F - 158F**Dimensions:** 1-1/4" x 2" x 3/4" Deep (32 x 51 x 19mm)

Model Description

400RC433 433MHz 1 Channel Reciever

168.00











# Wireless 4 1/2" Push Plate Switches

Includes: two Round or Square Push Plate Switches with matching surface mount back box, two wireless transmitters (400W1-433, 9V batteries included), and one wireless nano receiver (400RC433)


### **SPDT Model Description**

482S-KIT	SQUARE 4-1/2 Push Plate Switches (2), <b>5</b> Push to Open, blue infill, Square Surface Mount Back Boxes (2), Wireless Transmitters (2) and Wireless Receiver (1)	489.00
482R-KIT	ROUND 4-1/2 Push Plate Switches (2), <b>b</b> Push to Open, blue infill, Round Surface Mount Back Boxes (2), Wireless Transmitters (2) and Wireless Receiver (1)	536.00

# 480 Series CBC High-Low Compliant Wireless Push Plate Switch Kits Discount Code

CK

LIST

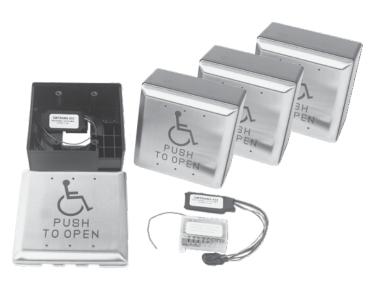

### Wireless 4 1/2" Push Plate Switche Kit for Calif. Building Code Compliance

Includes: four Square Push Plate Switches with matching surface mount back box, four wireless transmitters (400W1-433, 9V batteries included), and one wireless nano receiver (400RC433)

# **SPDT Model Description**

482S-CBCKIT

SQUARE 4-1/2 Push Plate Switches (4), 🔥 Push to Open, blue infill, Square Surface 886.00 Mount Back Boxes (4), Wireless Transmitters (4) and Wireless Receiver (1)