

Emergency Door Release

Distributor
Discount Code

V LIST



491



492

SDC 490 series emergency door release stations include 2-SPDT contacts for release of all doors on the same circuit and remote annunciation. A built-in local alarm is standard.

491	Blue break glass station, emergency door release, 2-SPDT 10 Amp contacts with built-in local alarm (12/24V), 2 replacement glass included. Single gang box mounted	191.00
491-GL4	Four replacement glass plates for 491	21.00
491-BB	Blue surface mount box for 491	63.00
492	Blue pull station, emergency door release, 2-SPDT 10 Amp contacts with built-in local alarm (12/24V), 2 replacement glass rods included. Single gang box mounted.	156.00
492-GL4	Four replacement glass rods for 492	21.00
492-BB	Blue surface mount box for 492	42.00

Communicating Bathroom Controls

Distributor
Discount Code

CK LIST



CB401-A
CB402-A



CB401-B
CB402-B

EmLock®

CB401-AU	Communicating bath switch, 630 Stainless Steel finish.	83.00
CB401-B	Emergency access switch, red. 2 Required	83.00
CB701	Emergency key switch, red	156.00

Electrified Lockset, HiTower® , or Strike Application

CB402-A	Communicating bath switch, U 630 Stainless Steel finish.	83.00
CB402-B	Emergency access switch, red. 2 Required	83.00
CB702	Emergency key switch, red	156.00

Reference page 97 for system operation and component requirements



PTH x 5 Ft Cable



F 10B Listed for 3hr Fire Rated Door

FEATURES

- 5' Ft Cable
- UL10B Listed for 3 Hour Fire Rated Doors
- 800,000 cycles. 8 times UL test criteria
- Wire Replacement Warranty

Power Transfer Hinge Application

Installed in the center hinge position of the door, PTH Power Transfer Hinges provide the concealed wires required to transfer power from the frame to electric hardware in the door for control and monitoring capability.

PTH-4Q	Four (4) Conductor Power Transfer Hinge 1 Amp @ 12/24V per pair 4.5" x 4.5" standard weight, 626 Dull Chrome	150.00
PTH-4Q-DPS	Four (4) Conductor Power Transfer Hinge with Door Status Contact 1 Amp @ 12/24V per pair Door Status Contact: 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	207.00
PTH-10Q	Ten (10) Conductor Power Transfer Hinge 1 Amp @ 12/24V per pair 4.5" x 4.5" standard weight, 626 Dull Chrome	202.00
PTH-10Q-DPS	Ten (10) Conductor Power Transfer Hinge with Door Status Contact 1 Amp @ 12/24V per pair Door Status Contact: 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	259.00
FOR ELECTRIC LATCH RETRACTION EXIT DEVICES AND OTHER HIGH INRUSH DEVICES		
PTH-2+4Q	16 Amp Inrush , 6 conductor power transfer hinge 1-pair 16 Amp inrush, 4 Amp continuous; 2-pair 1 Amp @ 12/24V 4.5" x 4.5" standard weight, 626 Dull Chrome	182.00
PTH-2+4QDPS	16 Amp Inrush , 6 conductor power transfer hinge, with door status contact 1-pair 16 Amp inrush, 4 Amp continuous; 2-pair 1 Amp @ 12/24V Concealed Door Position Contact, 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	233.00

Special Order Sizes and Heavy Weight Hinges

POA

SPECIFY FINISH

Dull Chrome finish is standard as specified by suffix Q.

To specify special finish, designate finish suffix below in lieu of Q.

C 605 Bright brass	H 613 Oil rubbed bronze	P 625 Bright Chrome	N/C
---------------------------	--------------------------------	----------------------------	------------



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdccsecurity.com • www.sdccsecurity.com

Price List Effective February 1, 2017

PTM Heavy Duty Series Electric Power Transfer Device

Distributor Discount Code **LZK LIST**



Miscellaneous Fire Door Accessories
UL 10C 3 Hr Fire Rated
Classified per UBC 7-2



PTM-2AL	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DV Aluminum Powder Coat, US28 equivalent	371.00
PTM-2BZ	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DV Dark Brown Powder Coat, US10B equivalent	371.00
PTM-10AL	Ten (10) Conductor Power Transfer Device: Ten (10) 24 Ga. wire 1 Amp @ 12/24V AC/DC Aluminum Powder Coat, US28 equivalent	371.00
PTM-10BZ	Ten (10) Conductor Power Transfer Device: Ten (10) 24 Ga. wire 1 Amp @ 12/24V AC/DC Dark Brown Powder Coat, US10B equivalent	371.00

Concealed Power Transfer Device



LIST

PT5



Miscellaneous Fire Door Accessory

PT-5	UL Listed Concealed Power Transfer Device, for use with all high and low current applications	63.00
-------------	---	--------------

Also recommended for use with Von Duprin* EL 33 and 99 series and other high inrush devices
*Von Duprin is a registered trademark of Ingersol Rand and Von Duprin. Not intended as endorsement.

Power Transfer Loops

Distributor Discount Code **V LIST**



PT-2U



PT-3V

PT-2U	Armored flex conduit, less wires, 18" long, 1/4"	20.00
PT-3V	Armored flex conduit, less wires, with wire junction box	47.00


Door Core Drill Guide

Distributor Discount Code **LZK LIST**


The SDC 7000-DG Laser Guided Wire Raceway Drill Fixture enables wire raceway preparation through particle filled and solid wood doors. The door core wire raceway permits the installation and wiring of electrified locksets, exit devices and electric hinges. The Laser Guided Wire Raceway Drill Fixture is easy to use without previous experience. The kit allows for drilling from the hinge side without removing the door from the frame.

The 7000-DGK Kit includes: **Laser Guided Door Core, Raceway Fixture, 1/4" x 6" Pilot Drill Bit, 3/8" x 50" Door Raceway Drill Bit** (Custom designed evacuator drill bit tool sharpened with 1' extra long flutes), **Fiberglass Wire Running Kit** (Flexible acrylic end connection, Brass hook end for pulling, Brass eye end for pushing), **Door Wedge, Kit Carry Case**

7000-DGK	Laser door core drill guide Kit	621.00
7000-DB3/8	3/8" x 50" evacuator drill bit	78.00
7000-PD 1/4 X 6	1/4" x 6" pilot drill bit	25.00



1/4" x 6" Pilot Drill Bit

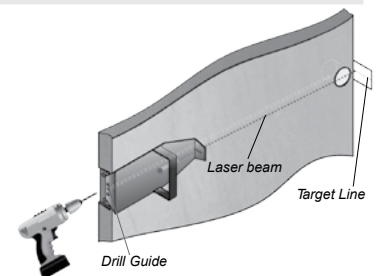



SDC's WRC Series 2-Channel wireless transmitter/receiver solution is specifically designed to be used as a receptionist button or remote release for single or dual door access control applications.

433MHZ 2-BUTTON PENDANT TRANSMITTER

LIST




- Operates with 400WRC-R2
- Frequency: 433.92MHz
- Housing: Keychain type
- Voltage: 6VDC

- Battery Replacement: – CR2016 Button Cell 3V Lithium battery (x 2)
- Transmitting distance: 160 feet (no obstructions)
- Activation: Hold “A” or “B” button for 1 sec.

Model	Description	
WRC-2B	433MHz 2-Button Pendant Wireless Transmitter	50.00

433MHZ 2-CHANNEL RECEIVER

LIST



- Size with housing (approx.): 2.5" H x 1.75" W x 1.2" D
- Frequency: 433.92MHz
- Environmental: Indoor
- Operating Temperature: -22°F – 140°F
- Input Voltage: 24VDC
- Current consumption: 9mA @24VDC (standby); 46mA (max)

- Relay Outputs: Two (2) Dry, Form C (SPDT)
- Contact rating: 10A@30VDC (resistive)
- Wiring connections: 12", 8-wire pigtail
- Transmitter coding capacity: 30 (fixed code)
- Transmitter programming using onboard learning button and status LED

Model	Description	
WRC-R2	433MHz 2-Channel Wireless Receiver	81.00

Mini Consoles

Distributor Discount Code

WK LIST

Mini Consoles provide control for one or two doors. Momentary or maintained push button switches with Bi-Color LED indicators.

Dimensions: 4-1/8" W x 3-1/8" H x 6-1/4" L
Contacts: 5 Amp @ 30VDC

Color: Beige
Power: 24VDC @ 0.02 Amp required for each LED



DTMO-1	One momentary switch and one LED	207.00
DTMO-2	Two momentary switches and two LEDs	259.00
DTMOMA-2	One momentary, one maintained switch and two LEDs	311.00
DTMA-2	Two maintained switches and two LEDs	259.00



WRC SERIES 2-Channel Wireless Transmitter and Receiver



CK LIST



SDC's WRC Series 2-Channel wireless transmitter/receiver solution is specifically designed to be used as a receptionist button or remote release for single or dual door access control applications.




433MHZ 2-BUTTON PENDANT TRANSMITTER

LIST

- **Operates with 400WRC-R2**
- **Frequency:** 433.92MHz
- **Housing:** Keychain type
- **Voltage:** 6VDC
- **Battery Replacement:** – CR2016 Button Cell 3V Lithium battery (x 2)
- **Transmitting distance:** 160 feet (no obstructions)
- **Activation:** Hold "A" or "B" button for 1 sec.

Model	Description	
WRC-2B	433MHz 2-Button Pendant Wireless Transmitter	50.00



433MHZ 2-CHANNEL RECEIVER

LIST

- **Size with housing (approx.):** 2.5" H x 1.75" W x 1.2" D
- **Frequency:** 433.92MHz
- **Environmental:** Indoor
- **Operating Temperature:** -22°F – 140°F
- **Input Voltage:** 24VDC
- **Current consumption:** 9mA @24VDC (standby); 46mA (max)
- **Relay Outputs:** Two (2) Dry, Form C (SPDT)
- **Contact rating:** 10A@30VDC (resistive)
- **Wiring connections:** 12", 8-wire pigtail
- **Transmitter coding capacity:** 30 (fixed code)
- **Transmitter programming using onboard learning button and status LED**

Model	Description	
WRC-R2	433MHz 2-Channel Wireless Receiver	81.00



Passive Infrared Egress Control

Distributor Discount Code

V LIST



MD-31DOW	Motion detector with time delay, white	235.00
MD-31DB	Motion detector with time delay, black	235.00

Time Delay Relay

Distributor Discount Code

CK List



Time Delay Relays

10TD	Time delay relay module with adjustable 1-60 second relock delay.	88.00
	Input: 12/24V AC/DC	Output: SPDT, dry contact
	Voltage: 2 Amps @ 30 VDC (resistive)	Size: 2-1/4"x 1-1/2" x 3/4"

Timer

Distributor Discount Code

CK LIST



14-2	7 day programmable timer with memory battery back-up capability	249.00
	Output: 1 SPDT, dry contact	
	Voltage: 16 Amps @ 30 VAC/DC	
	Specify 12V AC/DC or 24 AC/DC	



SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdccsecurity.com • www.sdccsecurity.com

Price List Effective February 1, 2017

Door Position Sensors


Distributor
Discount Code

V LIST



DPS-11
DPS-11-2

MC-4



MC-4M

DPS-11	Adjustable ball type SPDT 5 Amp	47.00
DPS-11-2	Adjustable ball type 2 SPDT 5 Amp	68.00
MC-4	Recessed magnetic (3/4", SPDT, 30VDC, 50mA)	57.00
MC-4PAK	Recessed magnetic (3/4", SPDT, 30VDC, 50mA) - 10 pack	311.00
MC-4M	Recessed magnetic mounted on 1-1/4" x 4-7/8" plate	88.00
MC-7	Biased high security recessed magnetic (1", SPDT, 30VDC, 50mA)	68.00

Price List Effective February 1, 2017

Accessories

UME Universal Module Enclosure

NK



Universal Module Enclosure for single modules
 Universal mounting standoffs will accommodate
 FB-4, UR-1, 12VR, ACM-1, PB-16, PB-8, PSM, 621B, or LR100EM boards.
 Box Dimensions: 5-5/8"H x 7-11/16"W x 3-3/8"D

UME	Single module enclosure	32.00
------------	-------------------------	--------------

SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdsecurity.com • www.sdsecurity.com



Emergency Access Panel

Distributor
Discount Code

CK LIST



APB1000A	Emergency access panel for lobby door system. Mushroom button with key reset and siren	363.00
-----------------	---	---------------