


Explosion Proof Maglock UL Certified

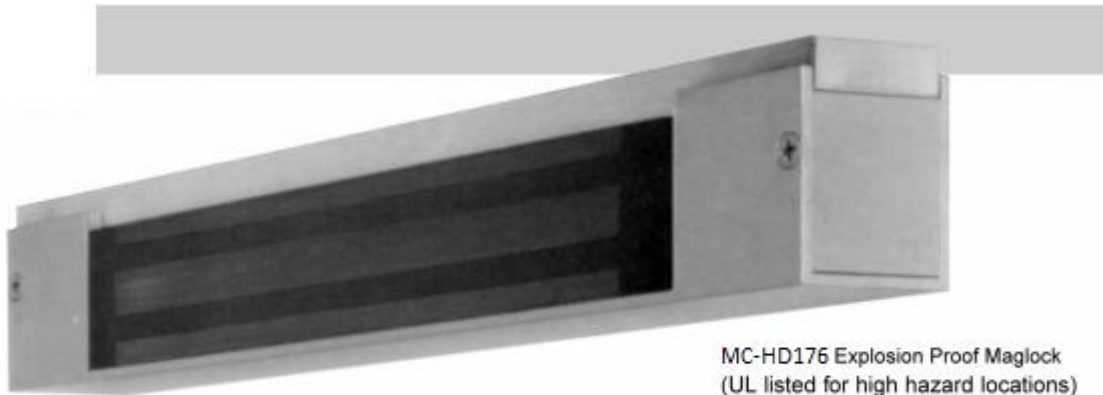

MAGLOCK TECHNICAL SPECS

- UL Certified for Class 1 Div 2 All Groups A, B, C, D Environment
- Only Singles Available (use two for double door applications)
- Approx. size 10 1/2" x 2" x 2"
- Holding Force 600lbs with 24VDC (324lbs with 12VDC)
- 0.25 Amps - 24VDC or (0.50 Amps - 12VDC)
- Built-In Spike or Surge Suppressions
- Satin Anodized Aluminum Finish
- Functionality for utilization as a door contact switch - Form "C" contact
- The only UL (Underwriters Labs) approved explosion proof maglock
- Please allow 2-3 weeks lead time for this item

Available Models: *

MC-HD176 24: single maglock for outswing doors, push side mount. 24VDC

MC-HDZB176 24: single maglock for inswing doors, pull side mount. 24VDC

*must be specific for UL Certification. Inswing maglocks come with the required inswing bracket assembly. Contact us at 1-866-500-5625 with any questions prior to purchase.