

CYLINDER

4040XP-3071

Cast Iron Cylinder Assembly

Handing Sizing

Non-handed Adjustable spring size 1–6, includes LCN Green Dial


Available Cylinder Options

DEL Delayed action cylinder




ADJUSTMENTS


- LCN Green Dial provides a visual reference of the spring power setting, taking the guesswork out of spring power adjustments.
- Additional adjustments can be made to the back check, main, and latch regulation valves which are labeled for easy identification.
 - Note: Labels correspond to a diagram with door swing zones located on the closer body.
- A patented positive stop feature on all regulation valves. The improved staking feature prevents the screw from being backed out and causing accidental damage to the product.
 - The patented regulation valve indicators provide visual color indicators of how far a screw is backed out—the more visible the component, the faster the speed.
 - This makes adjustments simpler and more intuitive.
- QR code that provides on-the-spot access to interactive installation and maintenance instructions and tech support.

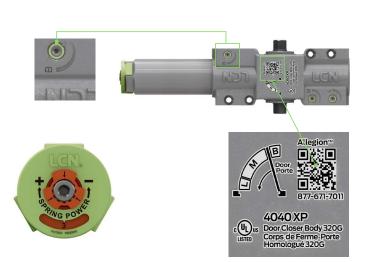


MOUNTING



Hinge (Pull Side)



Top Jamb (Push Side)



Parallel Arm (Push Side)