


PT2 / PT3

Power Transfer Loops

Surface Mount Power Transfer Loops provide a means of running wires from the frame to doors equipped with electric locks and exit devices.

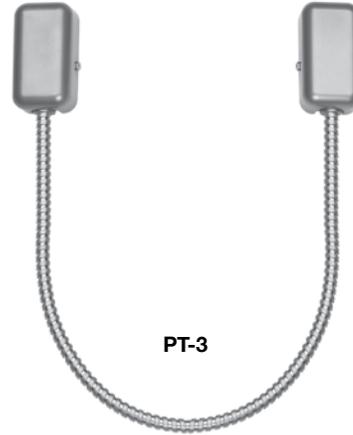

FEATURES

- Stainless Steel Armored Flex Conduit with End Caps or Termination Box. Recommended for Use with Hollow Metal and Aluminum Frames.

APPLICATION

Recommended for Use with Hollow Metal and Aluminum Frames.

SPECIFICATIONS

PT-2	
Construction	Stainless Steel
End Caps	Plastic
Length of Conduit	18", 1/4" I.D.
Weight	0.6 lbs

MODELS

- PT-2U** Power Transfer Loop with Black End Caps
- PT-3V** Power Transfer Loop with Aluminum Wire Termination Box, 1/4" I.D.
- PT-3/8V** Power Transfer Loop with Aluminum Wire Termination Box, 3/8" I.D.

PT-3	
Construction	Stainless Steel
End Caps	Aluminum Box
Length of Conduit	PT-3 20", 1/4" I.D.
	PT-3/8 20", 3/8" I.D.
Weight	0.6 lbs



