

# Securitron® RB Relay Board



The relay board provides normally-open or normally-closed relays that can be interconnected.

Ideal for interlock installations or wherever a basic relay board is used to trigger action, shunt alarms or report status from an access control system.

## Features

### Standard Features

- 4 DPDT relays with 2A contacts
- Individual coil connections — common negative or positive
- Replaces socket mount relays
- Dry contact connections via screw terminals
- Relays have low current coils / (13 mA at 12 VDC; 8 mA at 24 VDC)
- Allows operation from most LED drive outputs
- MagnaCare® lifetime replacement, no fault, no questions asked warranty

## Specifications

### Dimensions


- 4"W x 3-1/2"H

### Electrical (Max Draw)

- 32 mA at 12 VDC or 32 mA at 24 VDC

### Operating Temperature

- -13 to +158F [-25 to +70C]

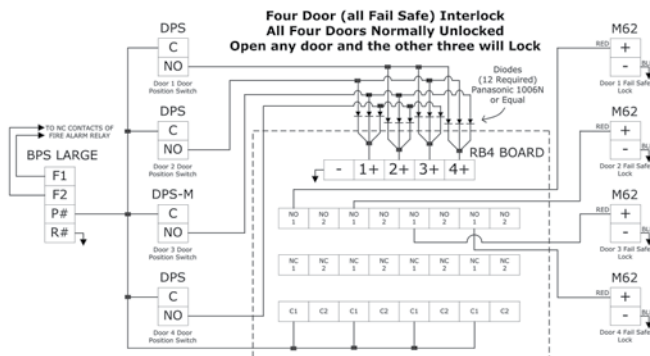

## How to Order

Model Series	Voltage
<b>RB-4</b>	<b>- 12</b>
<b>RLP</b> Relay Logic Pack	<b>12</b> 12VDC
<b>RB-4</b> Relay Board	<b>24</b> 24VDC



MagnaCare  
Warranty