



# ELECTRONIC ACCESS CONTROL PRODUCT CATALOG

Electric Strikes

# **ELECTRIC STRIKES**

# Strike Cross Reference

RCI		HES	Allegion/Von Duprin	Folger Adam	Adams Rite	Trine
<b>0 Series</b> Rim Strikes	0161	-	6112	310-4	-	EN800
	0162	9600	-	-	-	4800
	F0162	9500	6300	-	-	4800F
	0563	9400		-	-	4850
<b>F1 Series</b> Fire-Rated Centerline Strikes	F1114	7501	6211	712, 732, 712-75, 732-75	-	EN400
	F1119	-	6215	310-2	-	EN950
<b>2 Series</b> All-In-One Strikes	F2164/2364	1006 1006CLB	6400	742-75	-	4100
<b>4 Series</b> Centerline Strikes	4104/4304	5200-501A	5100	-		2012RD/RS
	4105/4305	-	-	-	-	-
	4107/4307	5200-503	-	-	-	-
	4108/4308	5200-502	-	-	-	-
	4114/4314	5200-501	4211	-	7170	-
	4119/4319	-	6200	-	-	-
	F4104	4500	-	-	-	-
	F4114	4500	-	-	7270	-
<b>6 Series</b> Centerline Strikes	S/L6504	5000-501A 5200-501A	5100	-	7101, 7160 7300, 7440	-
	S/L6505	-	-	-	-	-
	S/L6507	5000-503 5200-503	-	-	7130 7430	-
	S/L6508	5000-502 5200-502	5100	-	7110, 7310 7410	-
	S/L6514	5200-501 5000-501	5100 4200	-	-	2012
	S/L65U	-	5100	-	-	-
	7104/7304	5000-501A 5200-501A	5100	-	7100	2012RD
<b>7 Series</b> Centerline Strikes	7105/7305	-	-	-	-	-
	7107/7307	5000-503	-	-		2678
	7107/7108	5200-503	5100	-	7110	-
	7114/7314	5200-501	5100	-	7140	2012
	7119/7319	-	6200	-	-	-
<b>CL Series</b> Cylindrical Strikes	CL114	8000	-	-	-	-
	CL114LM	8000-LBM	-	-	-	-
	FCL114	8300	6212WF	-	-	-
	FCL114LM	8300-LBM		-	-	-
<b>Compact Strikes</b>	12C	-	-	-	-	323478LC



## 0 Series

# 0161 3/4" Semi-Mortise Rim Strikes

Semi-mortise rim strike designed for use with Pullman latch rim exit devices.  
1-3/4"W x 9"H x 2-3/8"D (45mm x 229mm x 61mm)



Energy  
200mA<sup>1</sup>  
12VAC/VDC Or  
24VAC/VDC



Strength  
1,500lbf Static  
70ft-lb Dynamic



Endurance  
500,000 Cycles



Mode  
Fail-Secure



Warranty  
3 Year Limited Warranty

<sup>1</sup>Max at 12VDC

- Semi-mortise rim strike designed for use with Pullman latch rim exit devices
- Accommodates 1/2" to 3/4" (13mm–19mm) latch projection
- Ensures proper latch alignment with horizontal adjustment
- Stainless steel ensures superior strength and creates a sleek aesthetic design
- Lockdown holes for secure mount
- Non-handed
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles

SECURITY



## How To Order

0161	-		x	32D
		05	-	12VAC/VDC
		08	-	24VAC/VDC
Voltage				

Example: **0161 - 05 x 32D**

## Accessories

Model	Description
0161DDH	Double door housing, SPC <sup>3</sup> finish

Note: UL 1034 Burglary-resistant listing does not apply with use of 0161DDH.

<sup>3</sup>SPC=Silver Powder Coat



## 0 Series 0162 3/4" Rim Strikes

Completely surface-mounted rim strike designed for use with Pullman latch rim exit devices.  
1-3/4"W x 9"H x 3/4"D (45mm x 229mm x 20mm)



**Energy**  
500mA<sup>1</sup>  
Field-Selectable  
12/24VDC & 12-24VAC  
**Latch Monitor**  
Optional Latch Monitor  
Model Available



**Strength**  
1,500lbf Static  
70ft-lb Dynamic  
**Fire-Rated**  
Optional 3-Hour  
Model Available<sup>2</sup>



**Endurance**  
250,000 Cycles  
**Warranty**  
5 Year Limited Warranty



**Mode**  
Fail-Secure

<sup>1</sup>Max at 12VDC

<sup>2</sup>Fire-rated (F) model only


- Completely surface-mounted – no frame cutting required
- Accommodates 1/2" to 3/4" (13mm–19mm) latch projection
- Mounting spacer included to provide enhanced latch engagement
- Stainless steel ensures superior strength and creates a sleek aesthetic design
- Horizontal adjustment ensure proper latch positioning to compensate for door misalignment – up to 1/4" (6.4mm)
- Conventional keeper design (one moving part)- promotes even load distribution
- Plug-in wire connectors
- Lockdown holes for secure mount
- HEX socket head cap screws for added support
- Installation tool included (HEX key)
- Non-handed (featuring horizontal solenoid design)
- 1/16" (1.5mm) mounting spacer for additional latch engagement included

- Brushed Stainless Steel (32D) finish
- Factory tested to over 4-million cycles of operation
- UL 294 Listed for Access Control Unit Accessory (6th Edition)
- UL 1034 burglary-resistant Listed
- UL 10C, 3-hour fire-rating Listed<sup>2</sup>
- CAN/ULC S104 3-hour fire-rating Listed<sup>2</sup>
- California State Fire Marshal Listed (CSFM: 3776-2127:0101)<sup>2</sup>
- Patent #: US 7,722,097



### Options


- LM – Latch monitor
- F – 3-hour fire-rating Listed



Conventional Keeper  
(One Moving Part)



Lockdown Holes  
For Secure Mount



Latch Monitor  
(0162LM Model)

### How To Order

Options			
F	– Fire-Rated		
0162		x	32D
	LM	– Latch Monitor	

Example: **F0162LM x 32D**

### Accessories

Model	Description
0162DDH	Double door housing, SPC <sup>3</sup> finish
0162MSK	1/16" (1.5mm) mounting spacer

Note: UL 1034 Burglary-resistant listing and fire-rating do not apply with use of 0162DDH.

<sup>3</sup>SPC=Silver Powder Coat



## 0 Series 0563 1/2" Rim Strikes

Slim, adjustable design ideal for tight-fitting installations. Designed for use with Pullman latch rim exit devices.  
1-3/4"W x 9"H x 1/2"D (45mm x 229mm x 13mm)



**Energy**  
19mA<sup>1</sup>  
Auto-Sensing  
12-24VDC  
**Mode**  
Field-Selectable  
Fail-Safe & Fail-Secure



**Strength**  
1,500lb Static  
70ft-lb Dynamic  
**Monitoring**  
Optional Latch Monitor  
Model Available



**Endurance**  
100,000 Cycles



**Warranty**  
5 Year Limited Warranty


<sup>1</sup>Steady state current at 12VDC, 153mA peak

- Surface-mounted – no frame cutting required
- Accommodates 1/2" to 3/4" (13mm–19mm) latch projection
- Includes two 1/8" (3.2mm) spacers to create two additional sizes, 5/8" (16mm) & 3/4" (19mm)
- Horizontal adjustment ensure proper latch positioning to compensate for door misalignment – up to 1/4" (6.4mm)
- Conventional keeper design (one moving part) – promotes even load distribution
- Lockdown holes for secure mount
- Low energy: draws less energy than traditional solenoid strikes
- Cost savings: operate 3X more strikes per power supply
- Cooler operation – runs cool to the touch; no suppressor kit needed
- High-grade stainless steel ensures superior strength and creates a sleek aesthetic
- Non-handed
- Plug-in wire connectors
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed
- Patent pending



### Options


- LM – Latch monitor



Conventional Keeper  
(One Moving Part)



Lockdown Holes  
For Secure Mount



Latch Monitor  
(0563LM Model)

### How To Order

0563 x 32D  
LM – Latch Monitor

#### Options

Example: **0563LM x 32D**

### Accessories

Model	Description
0162DDH	Double door housing, SPC <sup>2</sup> finish
0162MSK	1/16" (1.5mm) mounting spacer

*Note: Maximum voltage must not exceed 28V. Overheated or burnt PCBs caused by incorrect input voltage will not be covered under warranty.  
UL 1034 Burglary-resistant listing does not apply with use of 0563DDH.*

<sup>2</sup>SPC=Silver Powder Coat


**F1 Series**
**F1114 Centerline Strikes**

Features stainless steel faceplate with square corners ideal for hollow metal frames.

Faceplate: 1-1/4"W x 4-7/8"H (32mm x 124mm)

Insert Depth: 1-3/4" (45mm)


**F1119 Centerline Strikes**

Features stainless steel faceplate with square corners ideal for aluminum and wood frames.

Faceplate: 1-3/8"W x 9"H (34mm x 229mm)

Insert Depth: 1-3/4"D (45mm)



Energy  
200mA<sup>1</sup>  
11-16VAC, 12VAC/VDC  
Or 24VAC/VDC



Strength  
1,500lbf Static  
70ft-lb Dynamic



Endurance  
500,000 Cycles



Mode  
Fail-Secure



Fire-Rated  
CAN/ULC S104  
UL 10C 1-1/2-Hour



Warranty  
5 Year Limited Warranty

<sup>1</sup>Max at 12VDC

- Stainless steel faceplate with square corners
- Accommodates 1/2" (12.7mm), 5/8" (16mm) or 3/4" (19mm) latch projection
- Up to 1/4" (6.4mm) horizontal adjustment, relieves side-load pressure, ensuring proper latch alignment
- Saddle-mount housing design for enhanced strength and durability
- Tamper-resistant pry-guard concealed inside the frame
- Energy efficient coil design
- Mounting tabs, shims and fasteners included
- Non-handed
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed
- UL 10C, 1-1/2 hour fire-rating Listed
- CAN/ULC S104, 1-1/2 hour fire-rating Listed
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles

SECURITY


**How To Order**
**Faceplate**

14	— 1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Square Corner
19	— 1-3/8"W x 9"H (34mm x 229mm), Square Corner

F1	1		-		x	32D
				01		— 11-16VAC
				05		— 12VAC/VDC
				08		— 24VAC/VDC

**Voltage**

Example: **F1119-01 x 32D**



## 2 Series F2164/2364 All-In-One Strikes

Versatile design features adjustable deadbolt keeper and deadlatch ramp allowing it to work with most locks.

Faceplate: 1-1/4"W x 4-7/8"H (32mm x 124mm)

Insert Depth: 1-3/4"D (45mm)



**Energy**  
375mA<sup>1</sup>  
Field-Selectable  
12/24VDC, 12-24VAC<sup>2</sup>



**Strength**  
1,500lbf Static  
70ft-lb Dynamic



**Endurance**  
500,000 Cycles



**Mode**  
Fail-Secure & Fail-Safe



**Fire-Rated**  
Optional 3-Hour  
Model Available<sup>3</sup>



**Latch Monitor**  
Plug-In Latch Monitor  
Accessory Available



**Warranty**  
5 Year Limited Warranty

<sup>1</sup>Max at 12VDC

<sup>2</sup>12-24VAC not available with 2364 model

<sup>3</sup>Fire-rated (F) model only, 3-hour for single swing, 90-minutes for standard pair of doors



Saw-Tooth  
Adjustment Locator<sup>‡</sup>



Deadbolt Plug

- Versatile strike designed to work with most locks
- Accommodates 1/2" (12.7mm) to 3/4" (19mm) latch projection
- Adjustable deadbolt keeper and deadlatch ramp
- Accommodates up to 1" deadbolt (night-latch function only, bolt will not release)
- Plug-in wire connectors
- Runs cool – solenoid design prevents keeper from heating up
- Trim plate included to cover up irregular frame cut-out
- Stainless steel ensures superior strength and creates a sleek aesthetic
- Includes two keeper shims – 1/16" (1.5mm) and 1/8" (3mm) –for horizontal adjustment for misaligned frames (unique sliding design)
- Non-handed
- Factory tested to over 2-million cycles of operation
- Brushed Stainless Steel (32D) finish
- UL 294 Listed for Access Control Unit Accessory (6th Edition)
- UL 1034 burglary-resistant Listed
- UL 10C, 3-hour fire-rating Listed<sup>3</sup>
- CAN/ULC S104, 3-hour fire-rating Listed<sup>3</sup>
- California State Fire Marshal Listed (CSFM: 3776-2127:0103)<sup>3</sup>
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles
- Patent #: US 9,580,935

SECURITY



### Options

- F – 3-hour fire-rating Listed

### How To Order

Options				
F	–Fire-Rated <sup>4</sup>			
	2	64	x	32D
	1	–Fail-Secure		
	3	–Fail-Safe		

**Mode**

Example: **F2164 x 32D**

<sup>4</sup>Available in fail-secure mode only.

### Accessories

Model	Description
F2LM	Latch monitor plug-in kit (2A @ 24VDC)
2FP	Filler plate (for use when replacing discontinued 2 Series models)
F2-19	Centerline faceplate, 1-3/8"W x 9"H (35mm x 229mm), 32D finish
F2-29	Offset faceplate, 1-3/8"W x 9"H (35mm x 229mm), 32D finish



4104  
43044105  
43054107  
43074108  
43084114  
43144119  
4319

F4104



F4114

## 4 Series Centerline Strikes

Accommodates 3/4" (19mm) latch projection. Various faceplate options available to accommodate most frame types.

Insert Depth: 1-1/2" D (38mm)



Energy  
200mA<sup>1</sup>  
11-16VAC, 12VAC/VDC,  
24VAC/VDC



Strength  
1,500lbf Static<sup>2</sup>  
70ft-lb Dynamic



Endurance  
500,000 Cycles<sup>3</sup>



Mode  
Fail-Secure &  
Fail-Safe



Fire-Rated  
Optional 1-1/2-Hour  
Models Available<sup>4</sup>



Warranty  
3 Year Limited Warranty

<sup>1</sup>At 12VDC

<sup>2</sup>1,500lbf Static for fire-rated models, 1,000lbf for non-fire-rated 04 & 14 faceplates, 500lbf for 05, 07, 08 & 19 faceplates.

<sup>3</sup>Fire-rated (F) models only, 250,000 for other models

<sup>4</sup>Fire-rated (F) models only available in fail-secure mode with 04 & 14 faceplates.

- Accommodates 3/4" (19mm) latch projection
- 1-1/2" (38mm) cut-out depth accommodates most door frame material types
- Use with wide range of door thicknesses, 1-3/8" to 2-3/8" (35mm-60mm)
- Standard mounting tabs and fasteners included
- Non-handed
- Trim plate included to cover up irregular frame cutout
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed
- UL 10C, 1-1/2-hour fire-rating Listed<sup>4</sup>
- CAN/ULC S104, 1-1/2-hour fire-rating Listed<sup>4</sup>
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles<sup>3</sup>

SECURITY



### Options

- F – 1-1/2-hour fire-rating Listed

### How To Order

Options	Fire-Rated <sup>4</sup>	Mode	Fail-Safe	Fail-Secure	Voltage		
					11-16VAC	01	
					12VAC/VDC	05	
					24VAC/VDC	08	
					12VDC	06	
					24VDC	09	
					-	-	x 32D
			1	04	– 1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Radius Corner		
			3	05	– 1-1/8"W x 5-7/8"H (29mm x 150mm), Radius Corner		
				07	– 1-1/4"W x 6-7/8"H (32mm x 175mm), Radius Corner		
				08	– 1-7/16"W x 7-15/16"H (37mm x 202mm), Radius Corner		
				14	– 1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Square Corners		
				19	– 1-3/8"W x 9"H (34mm x 228mm), Square Corners		

Faceplate

Example: **F4104-05 x 32D**

<sup>4</sup>Available in fail-secure mode with 04 & 14 faceplates only.

### Accessories

Model	Description
BXES2	Weldable box
4/7JIG	Standard profile frame prep jig, aluminum
LEK01	1" lip extension kit for retrofit applications, black finish
LEK02	2" lip extension kit for retrofit applications, black finish
LEK03	3" lip extension kit for retrofit applications, black finish
SMT-01	Strike marketing template kit, aluminum
TP-47-5PK	Trim plates, 5 pack, black finish
930-LG	Standard profile latch guard, 32D finish

## 6 Series Centerline Strikes

Two profiles available to accommodate different latch projections. Various faceplate options available to accommodate most frame types.

Standard Insert Depth: 1-3/16"D (30mm)

Low Profile Insert Depth: 1-1/16" (27mm)



S/L6504



S/L6505



S/L6507



S/L6508



S/L6514



S/L65U



Energy  
375mA<sup>1</sup>  
Field-Selectable  
12/24VDC, 12-24VAC



Strength  
1,500lbf Static<sup>2</sup>  
70ft-lb Dynamic



Endurance  
500,000 Cycles<sup>2</sup>



Mode  
Field-Selectable  
Fail-Secure & Fail-Safe



Monitoring  
Optional Latch & Keeper  
Monitor Models Available



Warranty  
3 Year Limited Warranty

<sup>1</sup>At 12VDC

<sup>2</sup>04 & 14 faceplates only. Grade 2, 1,000lbf static for 05, 07 & 08 faceplates.

- Standard profile accommodates 3/4" (19mm) and Low-profile accommodates 1/2" (12.7mm) or 5/8" (16mm) latch projections
- 1/4" (6.4mm) horizontal adjustment
- Plug-in wire connectors
- Trim plate included to cover up irregular frame cut-out
- Non-handed
- Brushed Stainless Steel (32D)
- Factory tested to over 1-million cycles of operation
- UL 294 Listed for Access Control Unit Accessory (6th Edition)
- UL 1034 burglary-resistant Listed
- Certified to ANSI/BHMA standard A156.31, Grade 1, endurance 500,000 cycles<sup>2</sup>

SECURITY



### Options

- LMKM – Latch and keeper monitor

### How To Order

		Options	
		Latch And Keeper Monitor – LMKM	
		65	x 32D
Standard –	S	04	– 1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Radius Corners
Low Profile –	L	05	– 1-1/8"W x 5-7/8"H (29mm x 150mm), Radius Corners
Profile		07	– 1-1/4"W x 6-7/8"H (32mm x 175mm), Radius Corners
		08	– 1-7/16"W x 7-15/16" (37mm x 202mm), Radius Corners
		14	– 1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Square Corners
		U	– Universal, Includes 3 Faceplates (04, 08 & 14)
		Faceplate	

Example: **L6507LMKM x 32D**

### Accessories

Model	Description
S6JIG	Standard profile frame prep jig, aluminum (for S6504 and S6514)
L6JIG	Low profile frame prep jig, aluminum (for L6504 and L6514)
LEKS601	1" lip extension kit for retrofit applications, black finish (for Standard profile)
LEKS602	2" lip extension kit for retrofit applications, black finish (for Standard profile)
LEKS603	3" lip extension kit for retrofit applications, black finish (for Standard profile)
LEKL601	1" lip extension kit for retrofit applications, black finish (for Low profile)
LEKL602	2" lip extension kit for retrofit applications, black finish (for Low profile)
LEKL603	3" lip extension kit for retrofit applications, black finish (for Low profile)
S/L6504DD	Lip bracket and radius faceplate for aluminum double doors with flat astragal (for S/L6504)
S/L6507DD	Lip bracket and radius faceplate for aluminum double doors with flat astragal (for S/L6507)
SMT-01	Strike marketing template kit, aluminum
TP-S6-5PK	Trim plates, 5 pack, black finish (for Standard profile)
TP-L6-5PK	Trim plates, 5 pack, black finish (for Low profile)

7104  
73047105  
73057107  
73077108  
73087114  
73147119  
7319

## 7 Series Centerline Strikes

Accommodates 5/8" (16mm) latch projection. Various faceplate options available to accommodate most frame types.

Insert Depth: 1-1/2"D (38mm)



Energy  
280mA<sup>1</sup>  
11-16VAC, 12VDC,  
24VACVDC



Strength  
500lbf Static  
70ft-lb Dynamic



Endurance  
250,000 Cycles



Mode  
Available In  
Fail-Secure & Fail-Safe



Warranty  
3 Year Limited Warranty

<sup>1</sup>At 12VDC

- Accommodates 5/8" (16mm) latch projection
- 1/8" (3.2mm) horizontal adjustment
- 1-1/2" (38mm) cut-out depth
- Use with wide range of door thicknesses 1-3/8" to 2-3/8" (35mm-60mm)
- Mounting tabs, fasteners and trim plate included
- Non-handed
- Trim plate included to cover up irregular frame cutout
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed

SECURITY



### How To Order


		Voltage	
		11-16VAC	01
		12VDC	05D
		24VAC	07
		24VDC	08D
		12VDC	06
		24VDC	09
7	Fail-Safe	-	x 32D
Fail-Secure	1	04	- 1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI radius corners
Fail-Safe	3	05	- 1-1/8"W x 5-7/8"H (29mm x 150mm), radius corners
Mode		07	- 1-1/4"W x 6-7/8"H (32mm x 175mm), radius corners
		08	- 1-7/16"W x 7-15/16" (37mm x 202mm), radius corners
		14	- 1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI square corners
		19	- 1-3/8"W x 9"H (34mm x 229mm), square corners

### Faceplate

Example: **7104-05D x 32D**

### Accessories

Model	Description
BXES2	Weldable box
4/7JIG	Standard profile frame prep jig, aluminum
LEK01	1" lip extension kit for retrofit applications, black finish
LEK02	2" lip extension kit for retrofit applications, black finish
LEK03	3" lip extension kit for retrofit applications, black finish
SMT-01	Strike marketing template kit, aluminum
TP-47-5PK	Trim plates, 5 pack, black finish

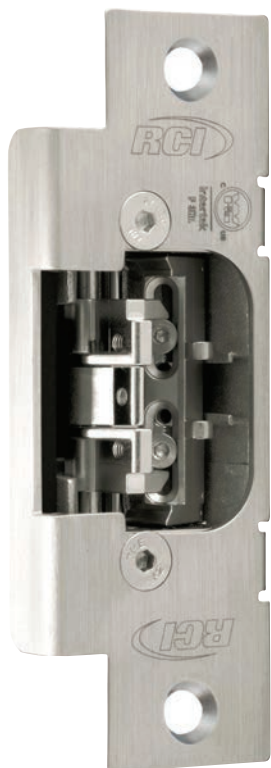

## CL Series Cylindrical strike

Accommodates 5/8" (16mm) latch projection. Designed to fit ANSI-prepped frames.  
Insert Depth: 15-16"D (24mm)



Energy  
280mA<sup>1</sup>  
Field-Selectable  
12/24VDC  
12-24VAC



Strength  
1,500lbf Static  
70ft-lb Dynamic



Endurance  
250,000 Cycles<sup>2</sup>



Mode  
Fail-Secure



Fire-Rated  
Optional 3-Hour  
Models Available



Monitoring  
Optional Latch Monitor  
Models Available



Warranty  
5 Year Limited Warranty

<sup>1</sup>At 12VDC

<sup>2</sup>100,000 Cycles for LM models

- Designed to fit ANSI-prepped (A156) frames
- Accommodates 5/8" (16mm) latch projection.
- 1/16" (1.6mm) horizontal adjustment and 1/2" (12.7mm) vertical adjustment
- Plug-in wire connectors
- Cooler operation – runs cool to the touch
- Non-handed
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed
- UL 10C, 3-hour fire-rating Listed<sup>1</sup>
- CAN/ULC S104, 3-hour fire-rating Listed<sup>1</sup>
- NFPA 252, 3-hour fire-rating Listed<sup>1</sup>
- UL294 Listed for Access Control Unit Accessory (6th Edition)
- NFPA 80 compliant<sup>1</sup>
- Patent pending



<sup>1</sup>Fire-Rated model only

### How To Order

Options			Options		
F	– 3-hour fire-rating Listed		LM	– Latch Monitor	
LM	– Latch monitor				
	CL	1		x	32D
		04		– 1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Radius Corners	
		14		– 1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Square Corners	
				<b>Faceplate</b>	

Example: **FCL114LM x 32D**



## 12C Compact Strike

A versatile strike suitable for all types of door frames.  
1-13/16"W x 2-3/4"H x 1-1/8"D (46mm x 70mm x 28mm)



Energy  
90mA  
12VDC



Strength<sup>1</sup>  
1,100lbf Static  
44ft-lb Dynamic



Mode  
Fail-Secure



Warranty  
1 Year Limited Warranty

<sup>1</sup>Internal testing

- Quick and easy to install
- Ideal for wooden, steel & aluminum frames
- Non-handed
- Versatile, compact design
- Replaces standard, non-electrified T-strikes
- Maintains integrity and strength of the door frame
- Brushed Chrome (26D)

### How To Order

12C x 26D



## VR165 Vertical Rod Strike

Accommodates 5/8" (16mm) roller latch. Designed for use with vertical rod exit devices with roller latch.



Energy  
450mA<sup>1</sup>  
Field-Selectable  
12/24VDC & 12-24VAC



Strength  
1,500lbf Static  
70 Dynamic ft-lb



Endurance  
250,000 Cycles



Mode  
Fail-Secure



Warranty  
5 Year Limited Warranty

<sup>1</sup>Max at 12VDC


- Accommodates 5/8" (16mm) roller latch
- Heavy-duty, surface mounted strike
- High grade stainless steel ensures superior keeper strength
- Ensure proper latch alignment – up to 1/4" (6.4mm) adjustment to compensate for door and frame misalignments
- Door stop adjustment for different rail thicknesses
- Horizontal solenoid prevents manipulation from vibration
- Conventional keeper design (one moving part) - promotes even load distribution
- Lockdown tabs for secure mount
- Non-handed
- HEX socket head cap screws for added support and tamper-resistance
- Plug-in wire connector
- Installation tool included (HEX key)
- Brushed Stainless Steel (32D) finish
- UL 1034 burglary-resistant Listed
- UL 294 Listed for access Control Unit Accessory (6th Edition)
- Patent #: US 7,722,097



### How To Order

VR165 x 32D

Example: VR165 x 32D

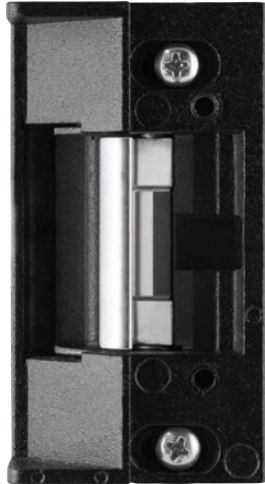

## Modular Strike Inserts

Includes Lip Bracket & Hardware Pack

### 4 Series

How To Order

		Voltage	
	Fail-Safe	11-16VAC	01
		12VAC/VDC	05
		24VAC/VDC	08
		12VDC	06
	Fail-Secure	24VDC	09
A	4		
		1	Fail-Secure
		3	Fail-Safe
Mode			
Example: <b>A41-05</b>			

### 6 Series

How To Order

				Options
A		65	LMKM	– Latch And Keeper Monitor
	S			
	L			
				Profile
Example: <b>AL65LMKM</b>				


### 7 Series

How To Order

		Voltage	
	Fail-Safe	11-16VAC	01
		12VDC	05D
		24VAC	07
		24VDC	08D
	Fail-Secure	12VDC	06
		24VDC	09
A	7		
		1	Fail-Secure
		3	Fail-Safe
Mode			
Example: <b>A71-05D</b>			


**4/7 Series Faceplates**

B4704 B4705 B4707 B4708 B4714 B4719

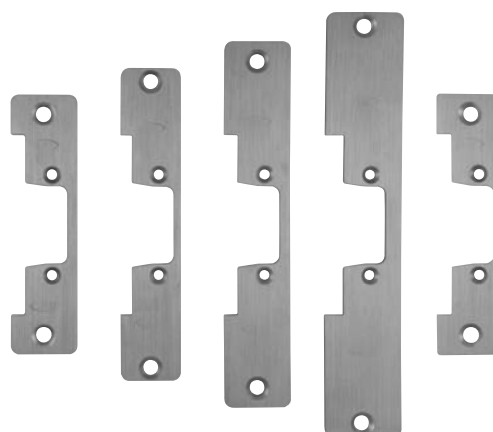
**6 Series Faceplates**

B604 B605 B607 B608 B614

# Modular Strike Faceplates

## 4/7/6 Series

### How To Order

		Series	
B	6	- 6 Series	
	47	- 4 & 7 Series	
		-	32D
		04	- 1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Radius Corner
		05	- 1-1/8"W x 5-7/8"H (29mm x 150mm), Radius Corners
		07	- 1-1/4"W x 6-7/8"H (32mm x 175mm), Radius Corners
		08	- 1-7/16"W x 7-15/16" (37mm x 202mm), Radius Corners
		14	- 1-1/4"W x 4-7/8"H (32mm x 124mm), ANSI Square Corners
		19	- 1-3/8"W x 9"H (34mm x 229mm), Square Corners <sup>1</sup>
		<b>Faceplate</b>	

Example: **B4707-32D**

<sup>1</sup>Only available with 4 & 7 series



## Accessories



### Double Door Housing

Ideal for double door applications with no center mullion. Door housing is mounted on the inactive door

Model	Description	Finish	Compatible With
0161DDH	Double door housing for 0161	SPC <sup>1</sup>	0161
0162DDH	Double door housing for 0162	SPC <sup>1</sup>	0162
0162DDHS	Double door housing for 0563	SPC <sup>1</sup>	0563

<sup>1</sup>SPC = Silver Powder Coat



### Frame Prep Jigs

Aids in cutting of aluminum or metal frames, improving accuracy.

Model	Description	Finish	Compatible With
4/7JIG	Frame prep jig for ANSI-sized electric strike	Aluminum	4104/4304, 4114/4314, 7104/7304, 7114/7314
S6JIG	Standard profile frame prep jig	Aluminum	S6504, S6514
L6JIG	Low profile frame prep jig	Aluminum	L6504, L6514



### Ice Pack

Heat reducer for continuous duty electric strikes.  
Operating voltage – 12 to 30VDC.

Model	Description / Dimensions	Compatible With
ICEPK	Heat reducer for continuous duty electric strikes	0/F1/2/4/6/7 Series



### Latch Guards

Added tamper-resistance for perimeter doors. Helps guard the latch from a prying attack. Designed with radius cut for easy installation around lockset roses.

Model	Description	Finish	Compatible With
930-LG	Standard profile latch guard	32D	4/7 Series
940-LG	High profile latch guard	32D	F2/6/F1 Series



### Lip Bracket Extension

Ideal for center-hung doors. Allows electric strike to be installed in frame and protects frame from damage.

Model	Description / Dimensions	Finish	Compatible With
LEK01	1" Lip extension kit for retrofit	Black	4/7 Series
LEK02	2" Lip extension kit for retrofit	Black	4/7 Series
LEK03	3" Lip extension kit for retrofit	Black	4/7 Series
LEKS601	1" Lip extension kit for retrofit (standard)	Black	S6 Series
LEKS602	2" Lip extension kit for retrofit (standard)	Black	S6 Series
LEKS603	3" Lip extension kit for retrofit (standard)	Black	S6 Series
LEKL601	1" Lip extension kit for retrofit (low profile)	Black	L6 Series
LEKL602	2" Lip extension kit for retrofit (low profile)	Black	L6 Series
LEKL603	3" Lip extension kit for retrofit (low profile)	Black	L6 Series



### Mounting Spacer Kits

Ideal for increasing latch depth.

Model	Description	Compatible With
0162MSK	1/16" mounting spacer for additional latch engagement	0162, 0563

## Accessories Cont'd



### Strike Marking Template Kit

Ideal for accurately guiding prepping of the frame for the installation.

Model	Description	Finish	Compatible With
SMT-01	Strike Marking Template Kit	Aluminum	4/6/7 Series



### Trim Plates

Ideal for concealing any imperfections caused while prepping the frame cut out.

Model	Description	Finish	Compatible With
TP-47-5PK	Trim Plate - 5 Pack	Black	4/7 Series
TP-L6-5PK	Low profile Trim Plate - 5 Pack	Black	L6 Series
TP-S6-5PK	Standard profile Trim Plate - 5 Pack	Black	S6 Series



### Weldable Box

Ideal for welding onto surfaces that are not already designed to accommodate an electric strike. Most commonly used on gates.

Model	Description	Finish	Compatible With
BXES2	Weldable Box	SPC/Steel	4104/4304, 4114/4314, 7104/7304, 7114/7314



### 2 Series Plug-In Latch Monitor

Latch monitor plug-in kit (2A @ 24VDC).

Model	Description	Compatible With
F2LM	Plug-in latch monitor kit (2A @ 24VDC). Improved design to accommodate 1/2" - 3/4" latch throw	F2164



### 2 Series Filler Plate

Filler plate (for use when replacing discontinued 2 Series models).

Model	Description	Compatible With
2FP	Filler plate for use when replacing discontinued 2 Series models	F2164/2364



### 6 Series Lip Bracket & Aluminum Faceplates

Model	Description	Compatible With
S6504DD	Lip bracket and aluminum faceplate for double doors with astragal (for S6504)	S6504
L6504DD	Lip bracket and aluminum faceplate for double doors with astragal (for L6504)	L6504
S6507DD	Lip bracket and aluminum faceplate for double doors with astragal (for S6507)	S6507
L6507DD	Lip bracket and aluminum faceplate for double doors with astragal (for L6507)	L6507

# Frame & Lock Type Reference Guide

		FRAME TYPE			LOCK TYPE				
									
<b>0 Series</b> Rim Strikes	0161	•	•	•	-	•	-	-	-
	0162	•	•	•	-	•	-	-	-
	F0162	•	•	•	-	•	-	-	-
	0563	•	•	•	-	•	-	-	-
<b>F1 Series</b> Fire-Rated Centerline Strikes	F1114	-	•	•	-	-	•	-	-
	F1119	•	•	•	-	-	•	-	-
<b>2 Series</b> All-In-One Strikes	F2164/2364	•	-	•	•	-	•	•	-
<b>4 Series</b> Centerline Strikes	4104/4304	-	•	-	-	-	•	-	-
	4105/4305	•	•	•	-	-	•	-	-
	4107/4307	•	•	•	-	-	•	-	-
	4108/4308	•	•	•	-	-	•	-	-
	4114/4314	-	-	•	-	-	•	-	-
	4119/4319	•	•	•	-	-	•	-	-
	F4104	-	•	-	-	-	•	-	-
	F4114	-	-	•	-	-	•	-	-
<b>6 Series</b> Centerline Strikes	S6504	-	•	-	-	-	•	-	-
	L6504	-	•	-	-	-	•	-	•
	S6505	•	•	•	-	-	•	-	-
	L6505	•	•	•	-	-	•	-	•
	S6507	•	•	•	-	-	•	-	-
	L6507	•	•	•	-	-	•	-	•
	S6508	•	•	•	-	-	•	-	-
	L6508	•	•	•	-	-	•	-	•
	S6514	-	-	•	-	-	•	-	-
	L6514	-	-	•	-	-	•	-	•
	S65U	•	•	•	-	-	•	-	-
	L65U	•	•	•	-	-	•	-	•
<b>7 Series</b> Centerline Strikes	7104/7304	-	•	-	-	-	•	-	•
	7105/7305	•	•	•	-	-	•	-	•
	7107/7307	•	•	•	-	-	•	-	•
	7108/7308	•	•	•	-	-	•	-	•
	7114/7314	-	-	•	-	-	•	-	•
	7119/7319	•	•	•	-	-	•	-	•
<b>CL Series</b> Cylindrical Strikes	CL114	-	•	•	-	-	•	-	-
	CL114LM	-	•	•	-	-	•	-	-
	FCL114	-	•	•	-	-	•	-	-
	FCL114LM	-	•	•	-	-	•	-	-
<b>Compact Strikes</b>	12C	•	-	•	-	-	•	-	-

# Terms & Conditions

## Freight

Transportation and handling charges on all goods are prepaid by RCI, and billed back to the customer, unless otherwise specified. Free freight will apply on all orders of US\$4000.00 net or more per purchase order within the continental United States, unless otherwise specified. Carrier to be selected by RCI; air freight and other requested shipments will be at the expense of the customer. Handling is added to freight.

## Product Changes

RCI reserves the right to discontinue models and/or make changes at anytime in materials, parts, components, specification, etc., without notice and without incurring any obligations on models built prior to the change.

## Shortages

A written claim for shortages must be made within 10 days after receipt of the order.

## Templates

Templates are available for all standard products, special templates and wiring diagrams for custom orders are available upon request for a minimal fee.

## Defective Products

Products that exhibit defects in any material and/or workmanship will be replaced by the factory upon verification by a local representative or the technical department at RCI. All returns must be issued a returned material authorization (RMA) number prior to being sent back to our facility. Returns can be done immediately or periodically, depending on the urgency. They will be addressed promptly. Warranty information is available upon request for individual products.

## Cancelled Orders

Cancelled orders are subject to an additional charge. Cancellation will not be accepted of goods that are not regular stock items, such as special orders. Damage Claims – Title passes to the customer upon delivery to the carrier. Loss and damage claims must be filed with the carrier by the customer. Disputes with the carrier do not alter our payment terms and are the responsibility of the customer.

## Credit Balance

Any resulting credit balance on a customer's account for returns or any reason other than RCI's error, must be used as a credit against future purchases. Checks will not be issued to pay off a credit balance, other than due to RCI's error.

## Prices

Orders are accepted with the understanding that they will be billed at prices in effect at the time of shipment, except when firm prices have been quoted. Prices are subject to change without notice.

## FOB

Prices are FOB our warehouse. Upon pick-up by the transportation company, shipments become the property of the purchaser, who assumes the risk of loss or damage in transit.

## Payment Terms

Payment terms are NET 30 DAYS to customers with approved credit. Cash discount terms of 2% - 10 days are available unless otherwise stated. We reserve the right to withhold shipment to accounts that do not meet our payment terms. State sales tax is extra where applicable.

## Returned Goods

Any defects or errors for which RCI is responsible for will be promptly rectified. Returned goods will not be accepted without prior approval and a returned material authorization (RMA) number, which must appear on all documentation relating to the returned merchandise. The original invoice number and purchase order number is required for all returns. All returns must be shipped with freight prepaid. Returned goods are subject to a minimum restocking charge of 20%. There may be additional charges to replace any abused or misused parts or components to restore the product to its original or saleable condition. Time limit for returning merchandise is 30 days after authorization, unless otherwise stated.

## Special Order Returns

Returns of "Special Orders" will not be authorized.

## C.O.D.

While processing a credit application, RCI may require your initial order C.O.D. We reserve the right to make C.O.D. shipments at our discretion.

## Discounts

All discounts are subject to foreign exchange fluctuations, changes in import duties, and other applicable taxes.

## E&OE

Errors and Omissions Excepted.

## Minimum Charge

No minimum charges apply.



65 Struck Court  
Cambridge, ON N1R 8L2  
Canada  
T: 1.800.265.6630  
F: 1.800.482.9795  
E: [sales\\_RCI@dormakaba.com](mailto:sales_RCI@dormakaba.com)  
[www.dormakaba.us](http://www.dormakaba.us)