


S6000 Spectra™ Series - S6000-G

Electric Dogging



ELECTRIC DOGGING

When energized by optional built-in key switch or remote switch manual, depressing the pushpad, causes the pushpad and latch to remain retracted (unlocked) providing push-pull door operation. When de-energized or signaled by a fire alarm, the pushpad and latch are released.

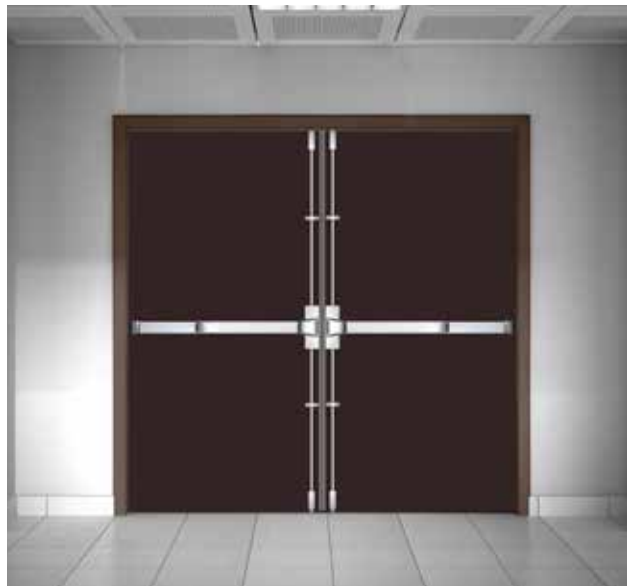

FEATURES

- Available for Fire Rated & Non Fire Rated Devices
- Built-In Optional Key Switch or Remote Switch enables Push-Pull Door Operation

MODELS

- **G** Electric Dogging (Failsecure 6100, 6200, 6300)

SPECIFICATIONS

Voltage 170/100 mA @ 12/24VDC

Monitoring Available Latch Status and REX Output Available



HOW TO ORDER:

1| SPECIFY MODEL

- S61** Rim Mount
- S62** SVR Surface Vertical Rod
- S63** Mortise (03 Lever trim included)
Specify: **EE/GE** Eclipse or Galaxy Escutcheon

2| SPECIFY FUNCTION

- 01** Exit Only
- 02** Dummy
- 03** Nightlatch

3| SPECIFY PANIC OR FIRE RATED

- P** Panic Exit Device
- F** Fire Exit Device

4| SPECIFY HAND (FOR S63 ONLY)

- RR** Right Hand Reverse Bevel, RHRB
- LR** Left Hand Reverse Bevel, LHRB

5| SPECIFY FINISH

- U** 630 Dull Stainless Steel

6| SPECIFY LENGTH

- 36** For 36" Door
- 42** For 42" Door
- 48** For 48" Door

7| SPECIFY ELECTRIC DOGGING

- G** Electric Dogging
Options:
 - KS** Built-In Key Switch
 - L1** Dogged Status Indicator, Less Cylinder, Green = Dogged (Unlocked)

8| SPECIFY TRIM FOR MORTISE S63 ONLY

- EE** Eclipse Escutcheon
- GE** Galaxy Escutcheon

9| SPECIFY TRIM (OPTIONAL) RIM S61 AND SURFACE S62 ONLY

Mechanical Trim (less cylinder)

- EK02U** Dummy Eclipse Escutcheon
- GK02U** Dummy Galaxy Escutcheon
- EK03U** Eclipse Escutcheon
- GK03U** Galaxy Escutcheon

Electric Trim

- Failsecure, field reversible to failsafe
- 4 ft cable
- 600/300 mA @12/24VDC

- EKE03U** Eclipse style electric trim less mortise cylinder, Stainless Steel Finish
- GKE03U** Galaxy style electric trim less mortise cylinder, Stainless Steel Finish



SPECIFY CYLINDER OPTIONS:

Rim Cylinder Required for 03 function, Mortise Cylinder Required for S6300

- CYL-6KDQ** 6 pin, 1.125" Mortise Cylinder, Keyed Different, Dull Chrome
- CYL-6KAQ** 6 pin, 1.125" Mortise Cylinder, Keyed Alike, Dull Chrome
- RIM-CYL-KA** 6-pin Rim Cylinder, Keyed Alike, Specifically For EK03, GK03

ACCESSORIES

PTH-4Q Four Wire, Dull Chrome Power Transfer Hinge

PTH-10Q Ten Wire, Dull Chrome Power Transfer Hinge



PTM-2AL Electric Power Transfer Device, Aluminum Powder Coat, US28 equivalent

PTM-2BZ Electric Power Transfer Device, Dark Brown Powder Coat, US10B equivalent



602RF 1 Amp, 12/24 VDC Class 2 Output Power Supply, 12" W x 12" H x 3.75" D Box

631RF 1.5 Amp, 12/24 VDC Class 2 Output Power Supply, 12" W x 12" H x 3.75" D Box

EMC 2 Station Door Sequencer
Each EMC provides interface and sequencing for two single or one double automatic door. Not required for manual doors.

