

Experience a safer and more open world

# Electronic Security Hardware

HES | Securitron Product Catalog



## Securitron<sup>®</sup> M68 Series Magnalock<sup>®</sup>

1,200 lbs holding force, bracket mounted Magnalock



## Easily installed, bracket mounted Magnalock for higher security interior applications.

Ideal for traffic control in high-use areas where higher security is needed, the Securitron M68 electromagnetic lock provides reliability, durability and strength with low maintenance and efficient power consumption. Bracket mounting and wiring chamber provide ease of installation.

#### **Features**

#### Standard Features

- PoE friendly
- Automatic dual-voltage
   —no field adjustment required
- Bracket mounting provides the easiest install for out-swing doors
- Rust resistant—all ferrous metal surfaces plated for durability
- Instant release circuit

   no residual magnetism
- Internal wire access chamber
- Noise suppression with included MOV
- Ultra-secure collapsing blind nuts mount to door frame for strength and reliability
- Strong hold and low maintenance
- MagnaCare® lifetime replacement, no-fault, no questions asked warranty

#### **Optional Features**

- D Integrated Door Position Switch (DPS)
- L LED indicator
- T Anti-tamper switch




















### **Dimensions**

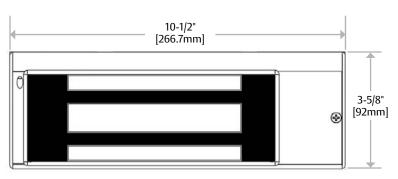





## Specifications

#### **Certifications**

- UL 10C Listed
- CAN4-S104, CAN/ULC-S533 Listed
- ANSI/UL 294 Listed
- CSA-C22.2 No.205 Listed
- ANSI/BHMA A156.23, Grade 2;
   E18501-1000 Compliant
- CSFM—California State Fire Marshal Approved
- CE:EN 50081-1(92), EN 61000-6-2(99) Approved

#### **Electrical**

- 250 mA at 12 VDC
- 125 mA at 24 VDC

#### **Holding Force**

• 1,200 lbs [544kg]

#### **Operating Temperature**

- 32° to 110°F [0° to 43°C]
- Indoor use only

#### Shipping Weight

• 13 lbs [5.44kg]

### How to Order

Model Series	Monitoring Options
M68	DLST
M68 1,200 lbs Magnalock	( <b>blank</b> ) No Monitoring
	<b>D</b> Door Position Switch
	L LED Indicator
	T Tamper Monitor

## Securitron<sup>®</sup> M38, M68 Bracket Mounted Magnalock<sup>®</sup> Accessories

#### DC Dress Cover

- Available for the M38 and M68
- Install using foam adhesive tape
- MagnaCare® lifetime replacement, no-fault, no questions asked warranty

Part Number	Description
DC-38SP	DC-M38, Stainless Polished
DC-68SP	DC–M68, Stainless Polished



## TJ Top Jamb-In-Swing Door Kit

- Available for the M38 and M68
- Used to mount the lock on the secure side of a door that swings into a secured area
- Includes a Z-Bracket and an oversized Dress Cover
- MagnaCare lifetime replacement, no-fault, no questions asked warranty

Part Number	Description
TJ-38CL	In-Swing Door Kit – M38, Clear
TJ-68CL	In-Swing Door Kit – M68, Clear



