CODE CARD PHONE

Managing and operating locks has never been easier. CL5500 smart locks offer advanced programming and access methods.

Program, operate and manage locks directly via the keypad or via any Bluetooth compatible smartphone by downloading the K3 Connect App. Program locks via your smartphone, generate and send codes for easy access, issue smart cards for alternative entry, track and control via audit trail. The App is available on Apple App Store for Apple devices or Google Play[™] for Android[™] devices by searching for K3 Connect.



Stay in Control

89

0 #

Install the K3 Connect App on a compatible smartphone. Controlling locks has never been so easy. Manage all aspects of your lock from your smartphone. From basic settings to multiple individual access periods for each client (user). The lock does not require Wi-Fi connection for operation. This significantly increases its potential for use in areas where Wi-Fi is unavailable or intermittent, adding to the benefits of this innovative product line.

CL5500 electronic

Code Card Phone

Multiple access. The CL5500 range of locks provides flexibility and convenience by providing a range of access methods allowing you to choose the most suitable entry method for your application. Allow clients (users) access via a simple code, allocate and register a MIFARE® compatible card or send an invitation to their phone.

Controlled Code Free

Allow free access at set times of day by setting the lock into Code Free mode (Passage Function). Removes the hassle of unlocking doors for free access periods. Reduce the administration burden of manually putting locks into Code Free mode. Create up to 10 different Code Free periods that automatically enable only when scheduled. Code Free is used in many different situations – office hours only, cleaning staff, school environment (set Code Free for break times).

NetCode

Control Entry. Set codes for a specific start date and time and that automatically expire after a set duration. Send these set codes via email or SMS. Additional features include blocking NetCodes and setting Flexi NetCodes.

Audit Trail

Keep track on who, when and where the lock was accessed. Download and view the lock audit trail data.

FUNCTIONS

CL5510 **Tubular Latch**

Outside lever turns freely without operating the latchbolt. When a valid code, card or smartphone is accepted, the keypad lights and the lever will retract the latchbolt. When the door closes the spring latch will automatically lock the door. Set the lock into Code Free (Passage Function) access period so that anyone can open the door without using a code.

CL5550 Mortise Lock

US Style ANSI UL Grade 1 Mortise with latchbolt and deadlatching feature. Outside lever turns freely without operating the latchbolt. When a valid code, card or smartphone is accepted. the keypad lights and the pressing down lever will retract the latchbolt. When the door closes the spring latch will automatically lock the door. Set the lock into Code Free (Passage Function) access period(s) so that anyone can open the door without using a code.

CL5510 PK

Coded heavy duty front plate

Electronic panic access kit to fit with new or existing panic equipment. Outside lever turns freely without operating the latchbolt. When a valid code or card is entered and the keypad lights, the lever will retract the latchbolt. When the door closes the spring latch will automatically lock the door. The key will open the door for management functions.

CODE FREE ACCESS

Set via the keypad or via smartphone.

CODE CHANGE METHOD On door via keypad or via a compatible smartphone by downloading the K3 Connect App.

AUXILLARY CONNECTIONS

Remote Release: REM1 is intended for pushbutton release where the lock will open for the normal set time. REM2 is intended for use where the lock needs to be released for a longer period. When a switch or relay connected to REM2 is closed, the lock will open for a period of 30 minutes after which the lock will revert to normal operation.


Sensor Mode: Allows two dry contact switches or sensors (door status and latch monitoring) to be connected. Trigger entry will be added to the audit trail.

Sensor + Alert: A hybrid mode combining the support for a single dry contact switch or sensor (as per Sensor Mode) and an output. The output can be connected to any compatible device, such as CCTV, with an input that supports the detection of a falling (changing) voltage.

Unlock + Lock Down: Support the connection of two dry contact switches. Connected to REM1, the switch will unlock the lock for the period set by the standard re-lock delay. Connected to REM2, the switch would trigger the Lock Down Mode of the lock where on the Master and Sub-Master Code can be used for entry.



PRODUCT DIMENSIONS

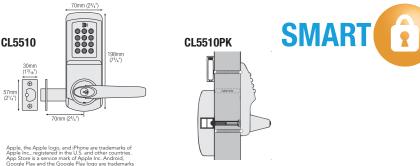

FEATURES

- Up to 350 Users
- 100 Phone Clients
- 100 Client User Codes
- 150 Client Smart Cards
- 12 button back-lit keypad
- · Keyless entry no lost keys
- NetCode generation technology
- Set up to 10 Code Free access periods
- Suspend and Restore any or all Clients
- Kevpad indicates locked / unlocked status
- Tamper time out and low battery warning
- Manage and operate locks via smartphone
- · Personal wireless connectivity for management
- Tubular Latch, Mortise Lock and Panic Kit available
- Simple upgrade from CL5000 range using same fixings
- · Auxiliary Connections enabling four different modes of operation

))

000

000

ÕÕÕ

000

CODELOCICB.COM

-9)

TECHNICAL SPECIFICATIONS

Battery Status	Monitor via App
Batteries	4 x AA Cells
Low Battery Warning	The keypad will flash red on opening to indicate batteries need to be changed
Memory	Stores 350 different Clients
Client User Codes	100
Client Smart Cards	150
Phone Clients	100
Spindle Type	5/16" spring loaded spindle
Material	Zinc Alloy
Door Thickness	$1^{3}/_{8}^{"} - 2^{3}/_{8}^{"}$
Latch Options	2 ³ / ₈ " and 2 ³ / ₄ "
Buttons	12 button back-lit keypad
Non Handed	Locks will fit doors hung on the left or right
Fitting Options	Vertical
Finish	Brushed Steel
Keying Alike	Locks can be supplied as keyed alike on request
Key Override	C Kwy 6-pin standard or SFIC
Codes	4 digit User Code / 6 digit NetCode / 8 digit Master Code
Smartphone App	K3 Connect App
PC Programming	NetCode Function only
NetCode	6 digit NetCode
Audit Trail	Function available
Auxiliary Connections	Two connectors (REM Ports)
	Four modes of operation:
	Remote Release, Sensor Mode,
	Sensor + Alert and Unlock + Lock Down
Storeroom function	Fitted with storeroom tailpiece as standard
Classroom function	Latch can be retracted by key when turned
Classroom function	Tailpiece supplied to allow (when fitted) lock to be left in code free mode when
	key is removed

Apple, the Apple logo, and iPhone are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Android, Google Play and the Google Play logo are trademarks of Google Inc.

Ð ę

*Codelocks electronic locks offer a two year guarantee and will be repaired, serviced or replaced free of charge if they develop a manufacturing fault. Faults caused by misuse, abuse and/or poor fitting are not covered by the guarantees.



www.codelocks.com

clinc2017v1